


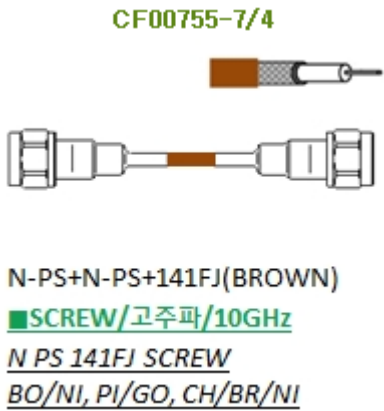

CF00755-7/4 1.5M	
Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

1.5M - S11/S22/S21 (SWR, SWR, dB)	
■_2GHz	- 1.05, 1.05, 0.92
■_4GHz	- 1.05, 1.04, 1.36
■_6GHz	- 1.04, 1.05, 1.72
■_8GHz	- 1.01, 1.01, 2.04
■10GHz	- 1.10, 1.09, 2.35

■12GHz	- 1.19, 1.21, 2.67
■14GHz	- 1.07, 1.06, 2.96
■16GHz	- 1.19, 1.15, 3.18
■18GHz	- 1.22, 1.23, 3.48

▶ NETWORK ANALYZER

▶ Test cable

▶ Test Adaptor

- E5071B (~8.5GHz)
- ZVA50 (~50GHz)

- 2.4mm Male to 2.4mm Male 50GHz Cable

- 2.4mm (J) to 2.92mm (J) AD00666-7/1
- N (J) SMA (P) AD00423-7/1

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

