



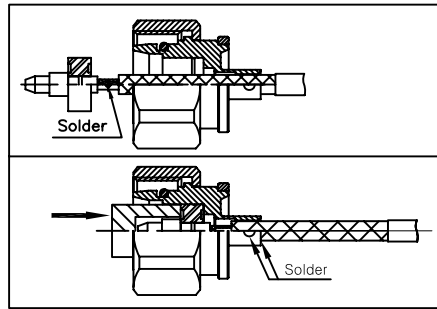


REVISION

No.	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2016. 06. 07.

케이블원자재 - 동선/심선도금두께 3미크론
콘넥타 - CN03608-7/3
작업방법 - 카본기, 일반납

- *Ferrule 압착 X, 본딩 튜브로 고정 할 것 (Tool size - HEX6.0)
- *본딩 Tube 및 수축 Tube 길이에 맞게 2겹으로 수축 작업
- *Center Marking 내용 및 길이는 영업에서 수주 등록시 내용 기재 바랍니다.
- *조립 시 케이블 심선과 핀 밀착하여 땀할 것*

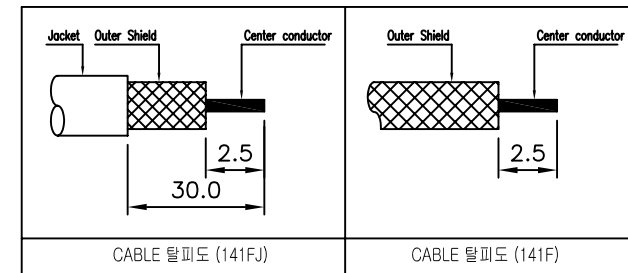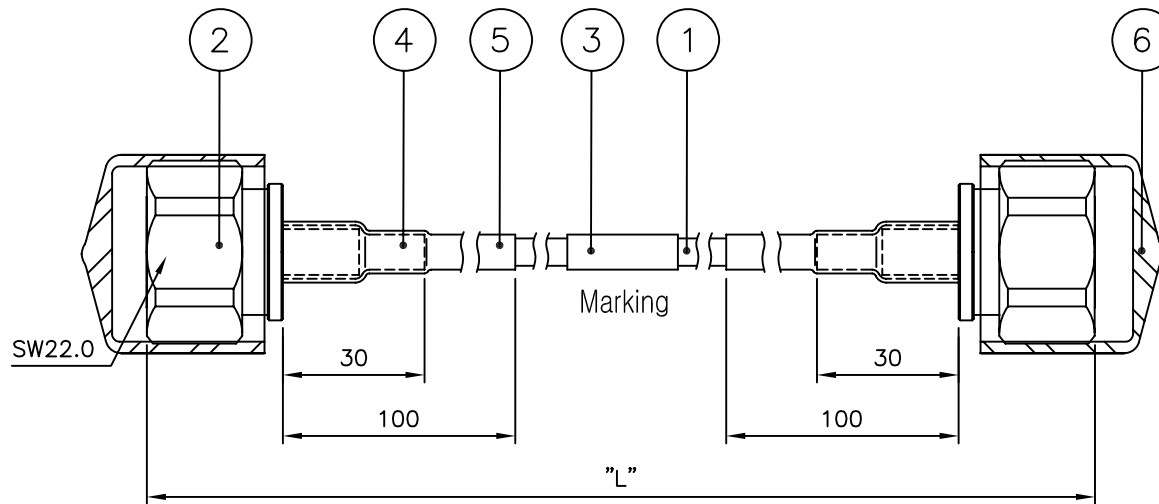

*ELECTRICAL SPEC

1. Frequency Range : DC ~ 3GHz
 2. Impedance : 50Ω (Nominal)
 3. V.S.W.R.(Max) : 1.2
 4. PIMD : -160dBc (20Wx2Tone)
- [CDMA / WCDMA 장비 기준]

Notes

1. RoHS & Pb-FREE
2. CONNECTOR MATERIAL & FINISHES
 - 2-1. 4.3-10 DIN50 PS----▶▶BODY : BRASS / SUCO Plate(3μm)
 - CONTACT : BRASS / Silver Plate(5μm)
 - CAP : BRASS / Nickel Plate

CUSTOMER		NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE		2016. 10. 04.					
CUSTOMER CODE		APPROVED BY					
CABLE LENGTH TOLERANCE		CHECKED BY					
0 ~ 1000mm : +5, -0		DRAWN BY					
1000 ~ 2000mm : +10, -0		CHECKED BY					
2000 ~ 3000mm : +15, -0		SCALE					
3000 ~ 4000mm : +20, -0		UNIT					
4000 ~ 5000mm : +25, -0		N/S					
5000 ~ : +10%							
		DATE					
		APPROVED BY					
		CHECKED BY					
		DRAWN BY					
		CHECKED BY					
		SCALE					
		UNIT					
		N/S					



TITLE		CABLE ASS'Y	
A4	DWG NO.	CF00868-7/2	
	DETAIL NO.		
	REVISION	I R	SHEET