


ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~5GHz
3. VSWR (Max) : 1.2
4. Insertion Loss(Min) : -5.0dB
5. PIMD SPEC : 150dBc 이상 (20W*2Tone) [WCDMA 장비 3차 기준]

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021.06.14.

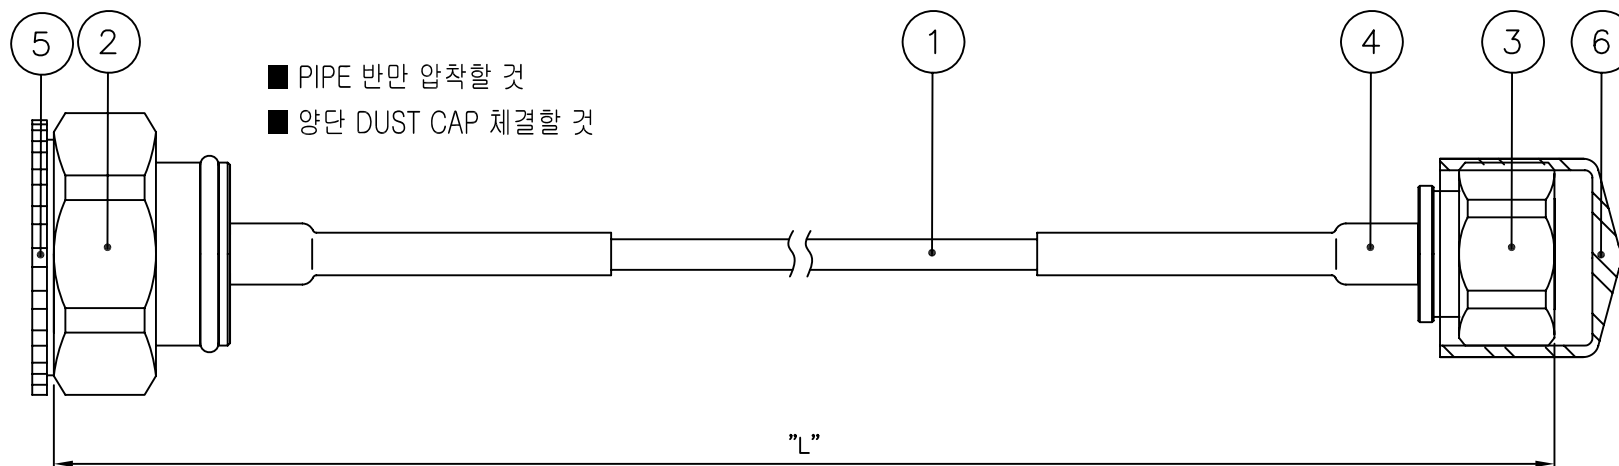

Notes

1. RoHS & Pb-FREE



2. CONNECTOR MATERIAL & FINISHES

2-1. 7/16 DIN50 PS-----▶▷BODY : BRASS / SUCO Plate(3μm)
CONTACT : BRASS / Silver Plate(5μm)
CAP : BRASS / Nickel Plate

2-2. 4.3-10 DIN50 PS-----▶▷BODY : BRASS / SUCO Plate(3μm)
CONTACT : BRASS / Silver Plate(5μm)
CAP : BRASS / Nickel Plate

■ 포장사양

1. 양단 END CAP 체결할 것
2. 1EA씩 권선작업 후 묶음처리할 것
3. 대비닐에 제품 5EA씩 포장할 것

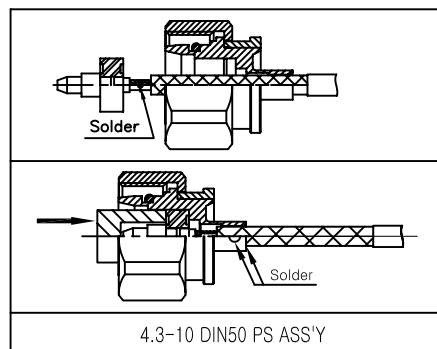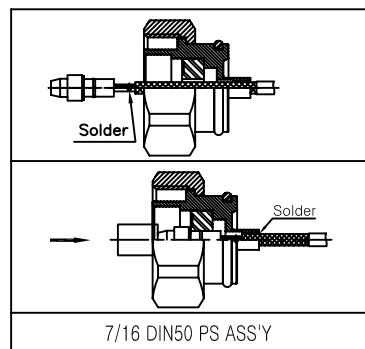

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE	2021. 06. 14.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
CUSTOMER CODE	APPROVED BY	I.C.KIM				
	CHECKED BY					
	DRAWN BY	S.Y.EUN				
	CHECKED BY					
CABLE LENGTH TOLERANCE	SCALE	UNIT		TITLE		
0 ~ 1000mm : +5, -0	N/S	mm		CABLE ASSY		
1000 ~ 2000mm : +10, -0				DWG NO. CF00878-7/2		
2000 ~ 3000mm : +15, -0			A4	DETAIL NO.		
3000 ~ 4000mm : +20, -0				REVISION		I R
4000 ~ 5000mm : +25, -0				SHEET		1 of 1
5000 ~ : +10%						