


CF00886-7/2

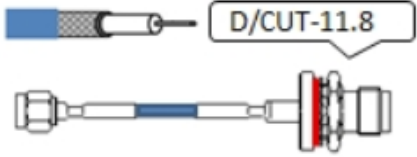

SMA-PS+TNC-JB
+85FJ(BLUE-PVC)
SMA PS
BO/GO, PI/GO, CAP/NI
TNC JB C18DG BHL:17.9mm
BO/NI, PI/GO


CF00886-7/2 260mm	
S11	
S22	
S21	
Impedance	50Ω
Temperature	-40℃~125℃

M1_1.0GHz	-	1.08,	1.08,	0.20
M2_2.0GHz	-	1.12,	1.12,	0.33
M3_3.0GHz	-	1.15,	1.15,	0.44
M4_4.0GHz	-	1.05,	1.06,	0.52
M5_5.0GHz	-	1.03,	1.03,	0.59
M6_6.0GHz	-	1.36,	1.44,	0.78
M7_7.0GHz	-	1.44,	1.53,	0.85
M8_8.0GHz	-	1.41,	1.48,	0.82
■ MAX 8GHz-	1.20:	1		

► NETWORK ANALYZER ► Test cable ► Test Adaptor

- ☐ E5071B (~8.5GHz)
- ☒ ZND (~8.5GHz)
- ☐ ZVA50 (~50GHz)
- ☒ N Male to SMA Male
10GHz Cable (CF00540-7/1)
- ☐ N Male to N Male
10GHz Cable (CF00539-7/1)
- ☐ 2.4mm Male to 2.4mm Male
50GHz Cable

4/10/2023 7:14:11 AM
1328.5170K92-102423-HQ

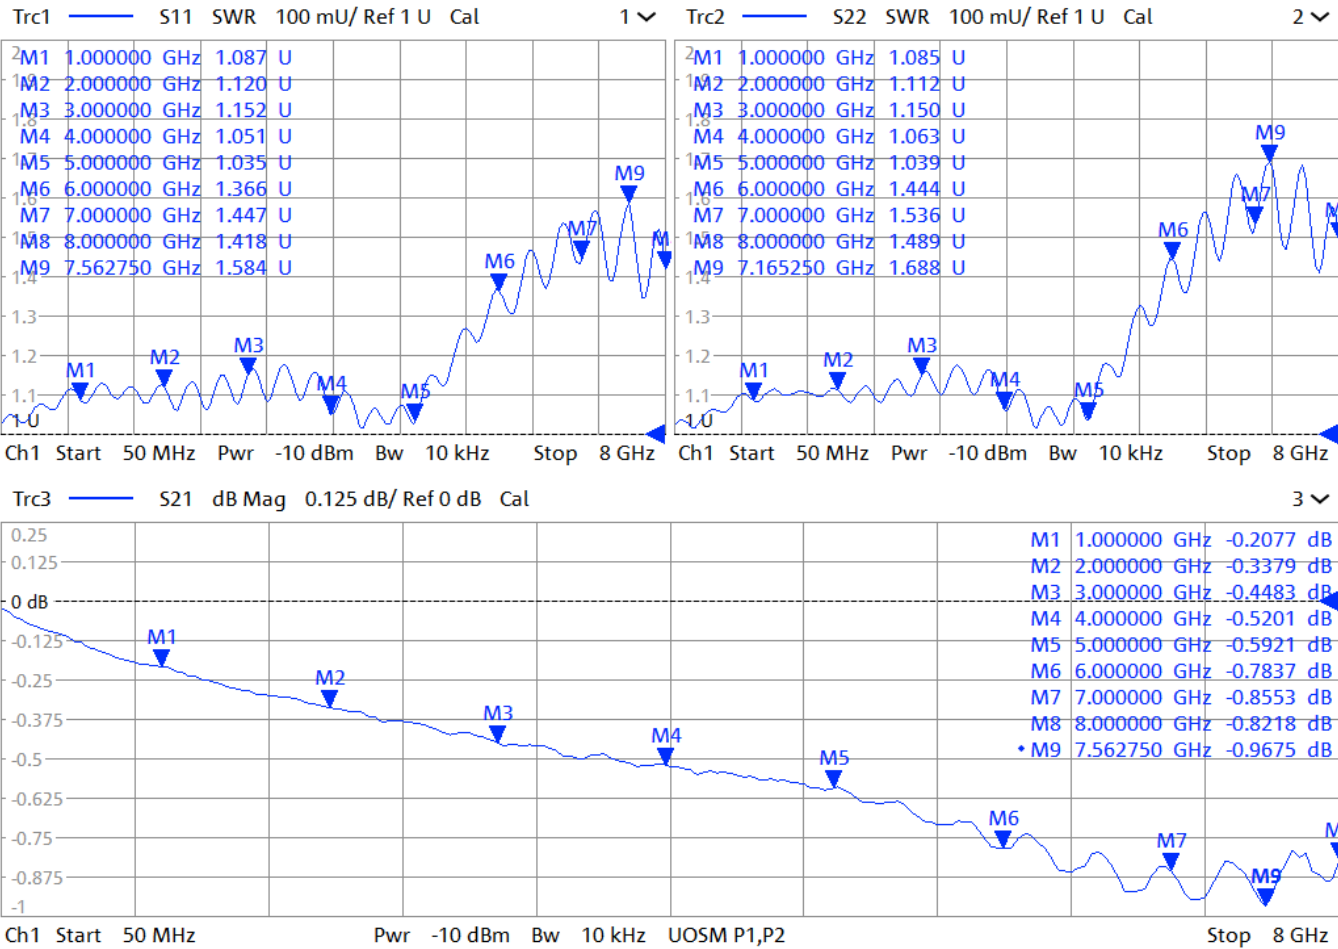

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)