


* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : 1.1GHz~1.7GHz
3. VSWR : 1.5(Max)
4. INSERTION LOSS : 1.0dB (Max)

REVISION

No.	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020. 05. 21.

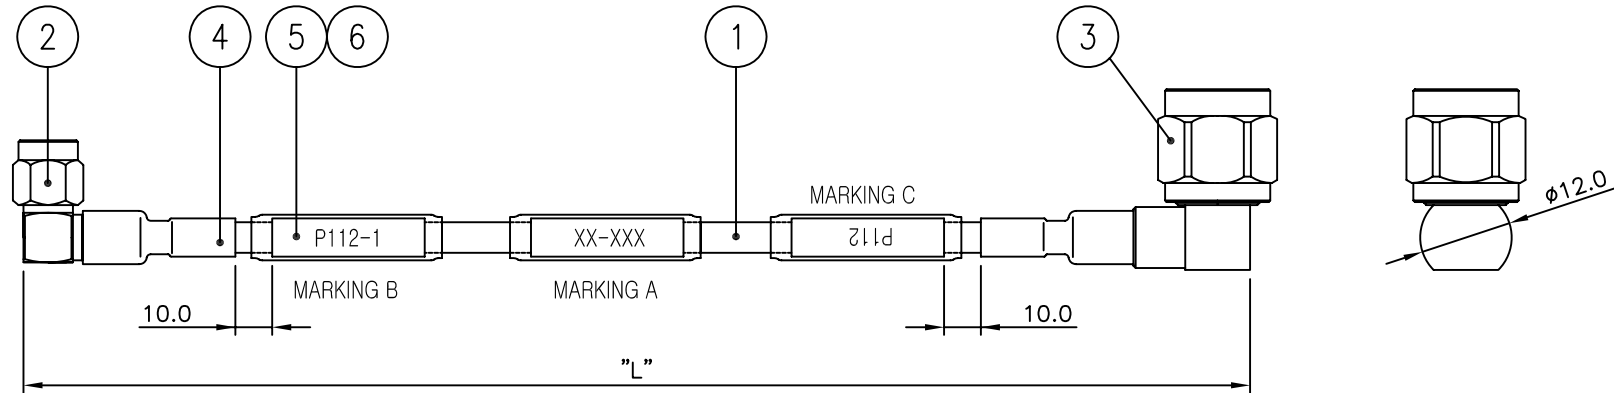


Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA PL----▶▶BODY : Gold Plating
CONTACT : Gold Plating
COVER : Gold Plating
CAP : Nickel Plating
 - 2-2. TNC PL-----▶▶BODY : SUCO 3micron Plating
CONTACT : Silver 5micron Plating
CAP : Nickel Plating
COVER : SUCO Plating

제작년도 일련번호

XX-XXX	P112-1	P112
MARKING A	MARKING B	MARKING C

* 마킹방향 주의

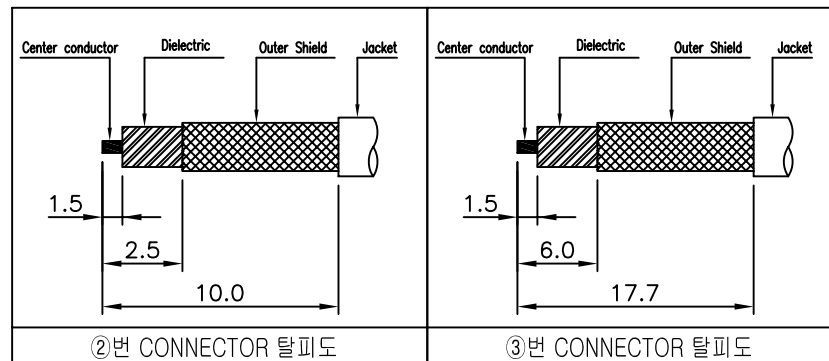

6	SHRINK TUBE	3	LS 전선	GSHS-1635F-φ6-CL	φ6~25mm (Clear)
5	MARKING TUBE	3	LS 전선	GSHS-1635F-φ6-WH	φ6~20mm (White)
4	BONDING TUBE	2	LS 전선	GSHS-1625W-φ6-BK	φ6~20mm (Black)
3	CONNECTOR	1	KJ COMTECH	CN03042-7/2	TNC50 PL
2	CONNECTOR	1	KJ COMTECH	CN03286-7/2	SMA50 PL
1	COAXIAL CABLE		EXPANTEL	EXMF-141T-50-CW	141MF(50Ω) BLUE

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE	2020. 05. 21.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
CUSTOMER CODE	APPROVED BY	I.C.KIM				
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			TITLE CABLE ASS'Y		
	DRAWN BY	S.Y.EUN				
	CHECKED BY			A4		
	SCALE	UNIT				
	N/S	mm				