


REVISION				
No.	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	G.Y.KIM	I.C.KIM	2016. 12. 27.

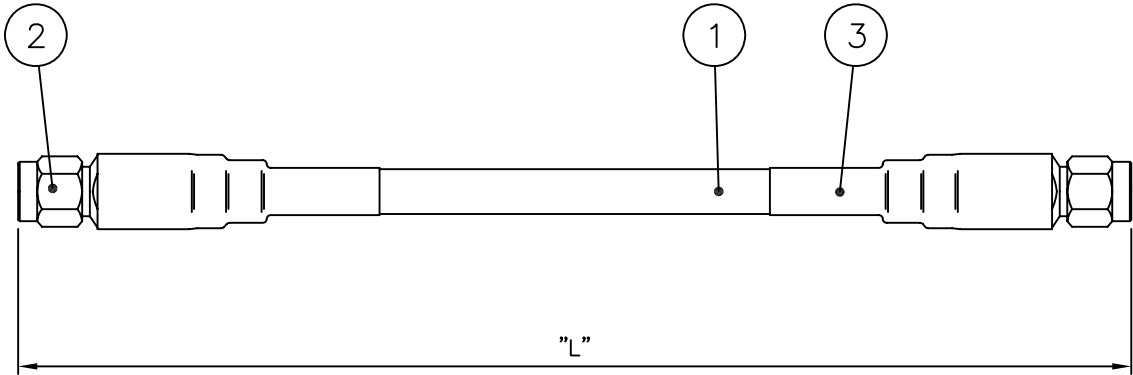


Notes


- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - 2-1. SMA50 PS----▶BODY : Nickel Plating
 - CONTACT : Gold Plating
 - CAP : SUS Plating

*사내계측기 : ~8GHz 사외계측기 : ~28GHz 테스트 진행

*결합도 2PAGE 참조

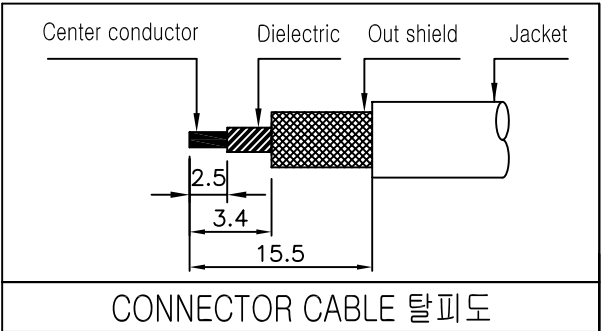

	3	SHRINK TUBE	2	LS TUBE	ATU00072-N/1	Ø12-60mm-BLACK		
	2	CONNECTOR	2	KJ COMTECH	CN03667-7/1	SMA50 PS		
	1	COAXIAL CABLE		EXPANTEL	ACA00449-N/1	EXLH-21r-BLUE		
CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS		
	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017				
CUSTOMER CODE	APPROVED BY	I.C.KIM						
	CHECKED BY	C.K.KIM						
CABLE LENGTH TOLERANCE	DRAWN BY	G.Y.KIM		TITLE				
	CHECKED BY							
	SCALE		UNIT		CABLE ASS'Y			
	N/S		mm					
0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%				A4	DWG NO.	CF00897-7/1		
					DETAIL NO.			
					REVISION	I R	SHEET 1 of 1	

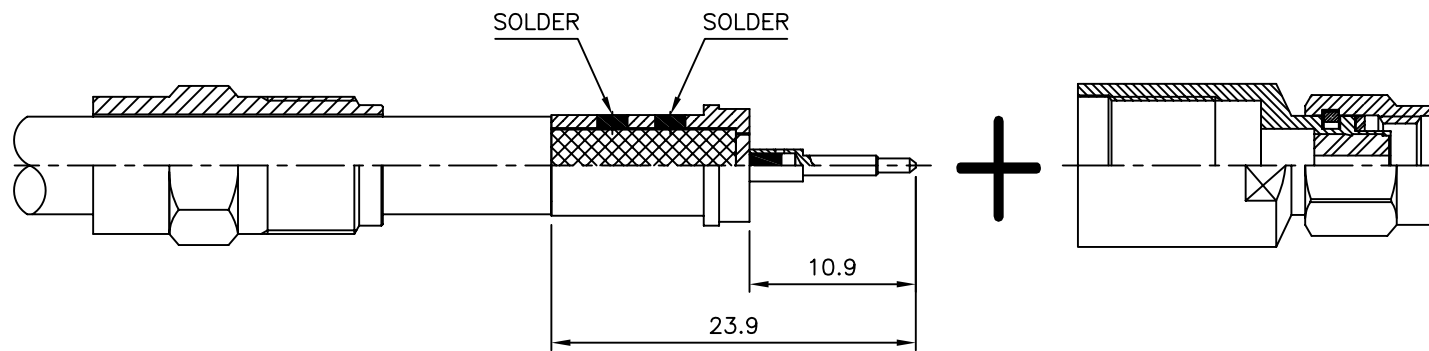

*조립방법

1. CABLE에 CLAMP를 체결 후 PIN과 납땜작업 한다.
2. 1번 조립품에 INSERT를 결합한 후 납땜작업을 한다. *과납주의
3. 2번 조립품과 BODY 조립체를 결합 후 CLAMP와 BODY의 SCREW를 조립한다.