


ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. VSWR (Max) : 1.2@DC~10GHz


REVISION

No.	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	G.Y.KIM	I.C.KIM	2016. 12. 27.

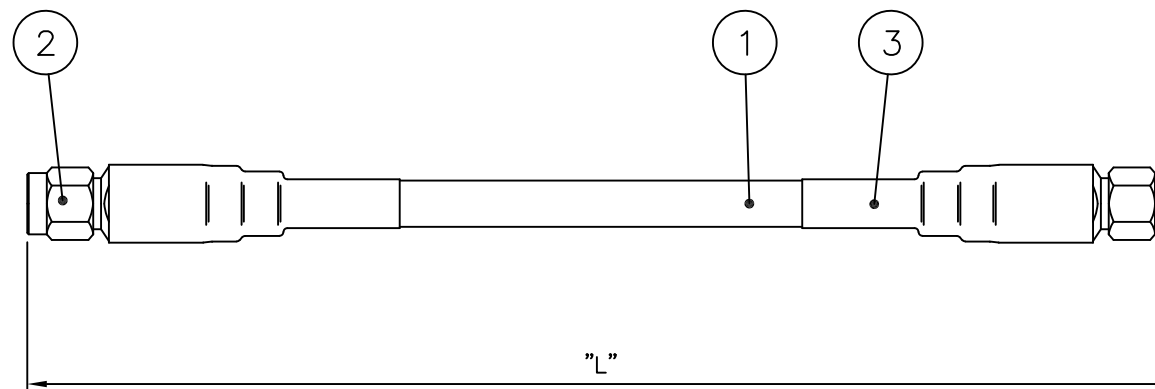


Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA50 PS---▶▶BODY : Nickel Plating
CONTACT : Gold Plating
CAP : SUS Plating

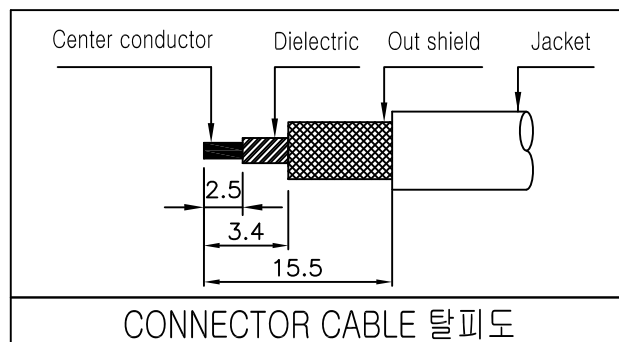

*결합도 2PAGE 참조

3	SHRINK TUBE	2	LS TUBE	ATU00076-N/1	Ø14-60mm-BLACK
2	CONNECTOR	2	KJ COMTECH	CN03668-7/1	SMA50 PS
1	COAXIAL CABLE		SUHNER	ACA00459-N/1	SUCOFORM-141(50Ω)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-0015 Fax : 82-32-347-8017		
APPROVED BY		I.C.KIM			
CHECKED BY		C.K.KIM			
DRAWN BY		G.Y.KIM			
CHECKED BY					
SCALE		UNIT	TITLE CABLE ASS'Y		
N/S	mm				
			A4		
			DWG NO.		CF00898-7/1
			DETAIL NO.		
			REVISION		I R
			SHEET		1 of 1

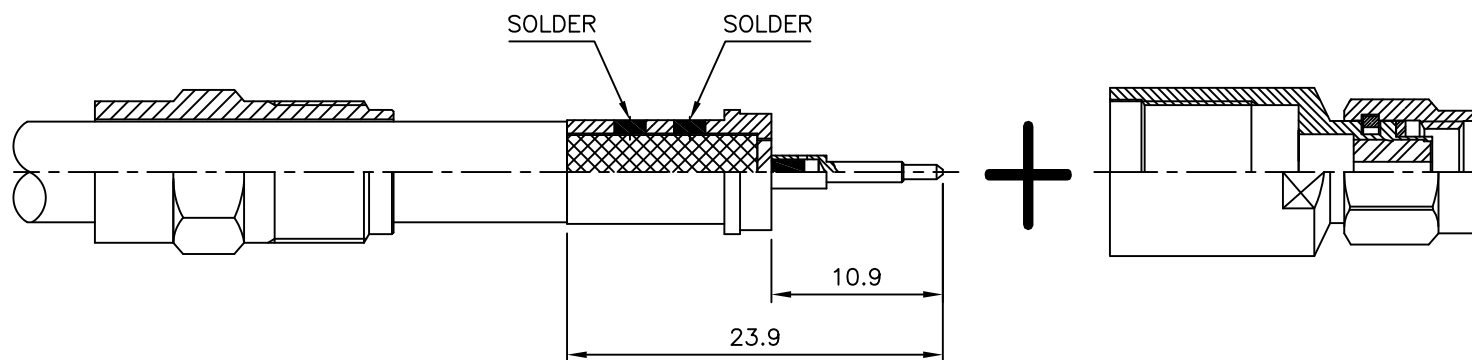

*조립방법

1. CABLE에 CLAMP를 체결 후 PIN과 납땜작업 한다.
2. 1번 조립품에 INSERT를 결합한 후 납땜작업을 한다. *과납주의
3. 2번 조립품과 BODY 조립체를 결합 후 CLAMP와 BODY의 SCREW를 조립한다.