


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	E.H.KIM	I.C.KIM	2014. 01. 15.

Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - MCX PS → BODY : Gold Plating
CONTACT : Gold Plating
 - SMA BJ → BODY : Nickel Plating
CONTACT : Gold Plating
NUT & WASHER : Nickel Plating
- 품번 3번 컷팅 방향 주의

* SPECIFICATION

1	Frequency range	DC ~ 3 GHz
2	Impedance	50Ω NOMINAL
3	V.S.W.R	1.2 : 1 max
4	Insertion Loss	-0.5dB min
5	Temp. Range	-40°C ~ 90°C

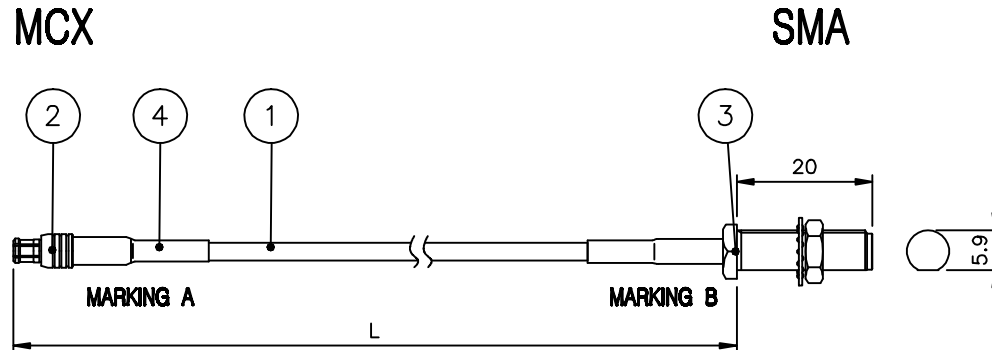

4	MARKING TUBE	2	LS TUBE	ATU00212-N/1	Ø4-20 White
3	CONNECTOR	1	KJ COMTECH	CN02551-7/2	SMA50 BJ
2	CONNECTOR	1	KJ COMTECH	CN00023-7/1	MCX50 PS
1	COAXIAL CABLE		EXPANTEL FLONTEC	ACA00048-N/1	RG316 (50Ω) BROWN

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
	DATE	2014. 01. 15.		 RF & MICROWAVE TECHNOLOGY Tel : 82-82-947-0015 Fax : 82-82-947-0017			
CUSTOMER CODE	APPROVED BY	I.C.KIM		TITLE			
	CHECKED BY						
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	E.H.KIM		A4 DWG NO. CF00922-7/1 DETAIL NO. REVISION I R SHEET 1 of 1			
	CHECKED BY						
	SCALE	UNIT					
	1 : 1	mm					