



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration			2014. 02. 11.

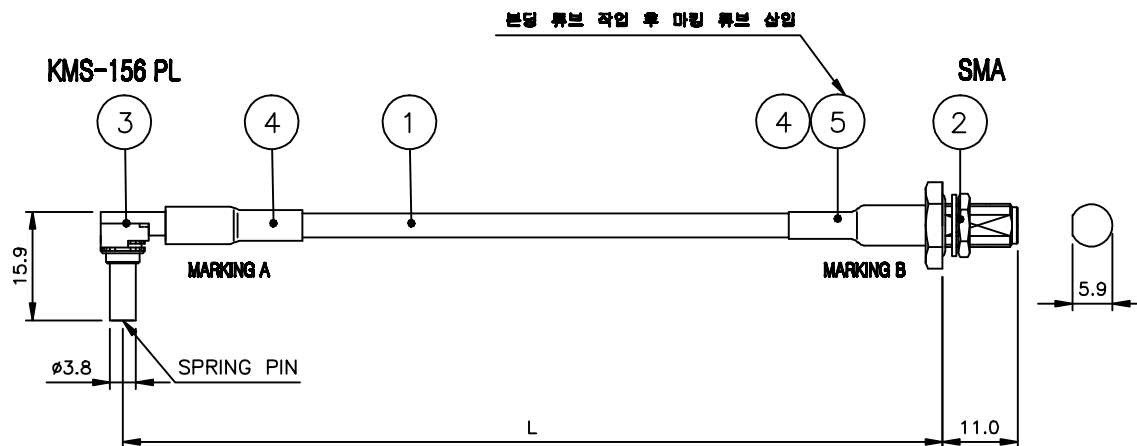

* 3번 항목 FERRULE 압착 주기.

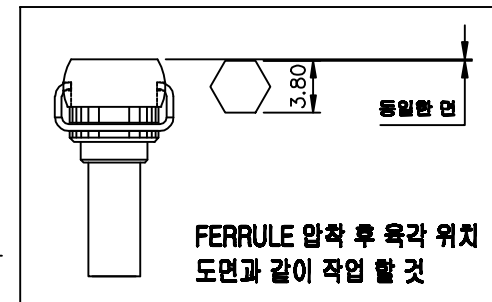

▶ ELECTRICAL SPECIFICATIONS

Impedance : 50Ω

Frequency Range : DC~2.5GHz

V.S.W.R : 1.3 max

Notes

1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

- 2-1. SMA BJ → BODY : Gold Plating
CONTACT : Gold Plating
NUT & WASH ER : Gold Plating
- 2-2. KMS156 PL → BODY : Nickel Plating
CONTACT : Gold Plating
COVER : Nickel Plating
CAP : Nickel Plating

5	BONDING TUBE	1	LS TUBE	ATU00006-N/1	Ø20 Black
4	MARKING TUBE	2	LS TUBE	ATU00216-N/1	Ø20 White
3	CONNECTOR	1	KJ COMTECH	CN08106-7/4	KMS-156 PL
2	CONNECTOR	1	KJ COMTECH	CN00106-7/1	SMA50 BJ
1	COAXIAL CABLE	1	FUJIKURA	ACA00074-N/1	1.5D-HQEW (BLACK)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS
	DATE	2014. 02. 11.				
CUSTOMER CODE	APPROVED BY					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY					
	DRAWN BY					
	CHECKED BY					
SCALE	N/S	UNIT	mm			
				TITLE		
				CABLE ASS'Y		
				DWG NO.	CF00923-7/1	
				DETAIL NO.		
				REVISION	IR	SHEET 1 of 1