



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration			2014. 02. 11.

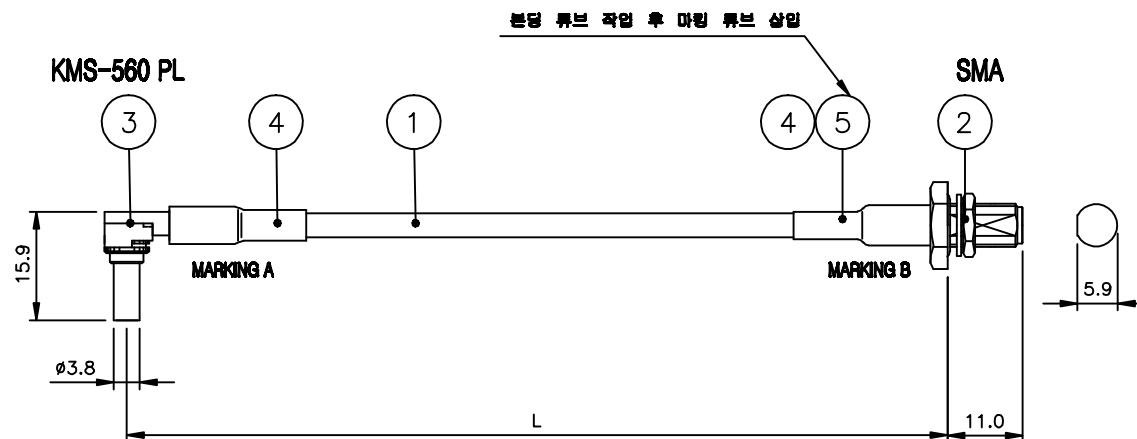

* 3번 항목 FERRULE 압착 주기.

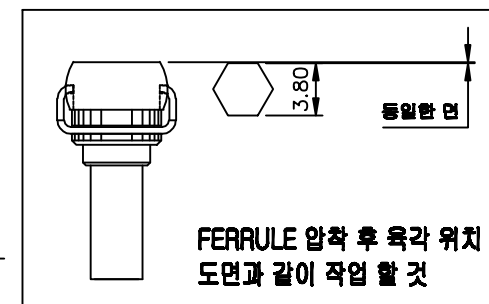

▶ ELECTRICAL SPECIFICATIONS

Impedance : 50Ω

Frequency Range : DC~2.5GHz

V.S.W.R : 1.3 max

Notes

1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

2-1. SMA BJ → BODY : Gold Plating
CONTACT : Gold Plating
NUT&WASER : Gold Plating

2-2. KMS560 PL → BODY : Nickel Plating
CONTACT : Gold Plating
COVER : Nickel Plating
CAP : Nickel Plating

5	BONDING TUBE	1	LS TUBE	ATU00008-N/1	Ø6x20 Black
4	MARKING TUBE	2	LS TUBE	ATU00216-N/1	Ø6x20 White
3	CONNECTOR	1	KJ COMTECH	CN03120-7/2	KMS-560 PL
2	CONNECTOR	1	KJ COMTECH	CN00108-7/1	SMA50 BJ
1	COAXIAL CABLE	1	FUJIKURA	ACA00074-N/1	1.5D-HQEW (BLACK)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS
	DATE	2014. 02. 11.				
CUSTOMER CODE	APPROVED BY					
	CHECKED BY					
	DRAWN BY					
	CHECKED BY					
CABLE LENGTH TOLERANCE	SCALE	UNIT				
0 ~ 1000mm : +5, -0	N/S	mm				
1000 ~ 2000mm : +10, -0						
2000 ~ 3000mm : +15, -0						
3000 ~ 4000mm : +20, -0						
4000 ~ 5000mm : +25, -0						
5000 ~ : +10%						

TITLE			
CABLE ASS'Y			
DWG NO.	CF00924-7/1		
DETAIL NO.			
REVISION	I R	SHEET	1 of 1