


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	E.H.KIM	I.C.KIM	2014. 02. 14.

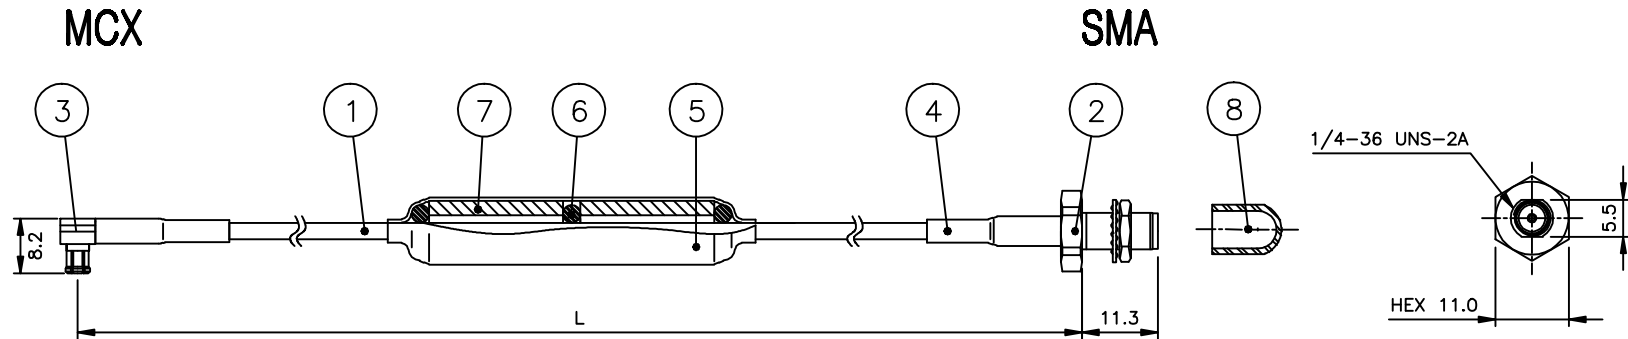

주 기

1. SMA BJ H-CUTTING 방향 주의 할 것.
2. 품번 8번 END CAP 별도 포장 할 것.
3. 품번 2번 제품의 NUT, WASHER 별도 포장 할 것.

ELECTRICAL SPECIFICATIONS

Impedance : 50Ω
Frequency Range : DC~2.7GHz
V.S.W.R : 1.25 max
Insertion Loss : - 0.6dB min

측정 방법

1. 위 주파수를 설정 한다.
2. SMA FEMALE 2PORT CAL을 한다
3. 1PORT에 SMA-BJ를 체결 한다
4. 2PORT에 MCX(F)-SMA(F) ADAPTOR를 연결 후 MCX-PL을 체결 한다.
5. 측정 값을 확인 한다.

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA BJ → BODY : Gold Plating
CONTACT : Gold Plating
NUT : Gold Plating
WASHER : Gold Plating
 - 2-2. MCX LP → BODY : Gold Plating
CONTACT : Gold Plating
COVER : Gold Plating

8	END CAP	1	A-ONE TECH	DGK00089-N/1	PVC RED SMA
7	FERRITE CORE	2	LAIRD TECH	DKC00109-N/1	2880355-000
6	GASKET	3	A-ONE TECH	DGK00157-N/1	SILICONE RED AN-103
5	SHRINK TUBE	1	SUMITOMO	ATU00068-N/1	Ø10x55 Black
4	BONDING TUBE	2	SUMITOMO	ATU00004-N/1	Ø4x20 Black
3	CONNECTOR	1	KJ COMTECH	CN00714-7/1	MCX(M)PA
2	CONNECTOR	1	KJ COMTECH	CN08170-7/1	SMA(F)BH
1	COAXIAL CABLE	1	EXPANTEL FLONTEC	ACA00048-N/1	RG316 (50Ω) (BROWN)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS			
	DATE 2014. 02. 14.			 RF & MICROWAVE TECHNOLOGY TEL : 02-02-047-0018 FAX : 02-02-047-0017					
CUSTOMER CODE	APPROVED BY	I.C.KIM							
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY					TITLE CABLE ASS'Y			
	DRAWN BY	E.H.KIM							
	CHECKED BY					A4	DWG NO.	CF00925-7/1	
	SCALE	UNIT		DETAIL NO.					
	N/S	mm		REVISION	I R	SHEET	1 of 1		