


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	M.H.SONG	I.C.KIM	2013.02.18.

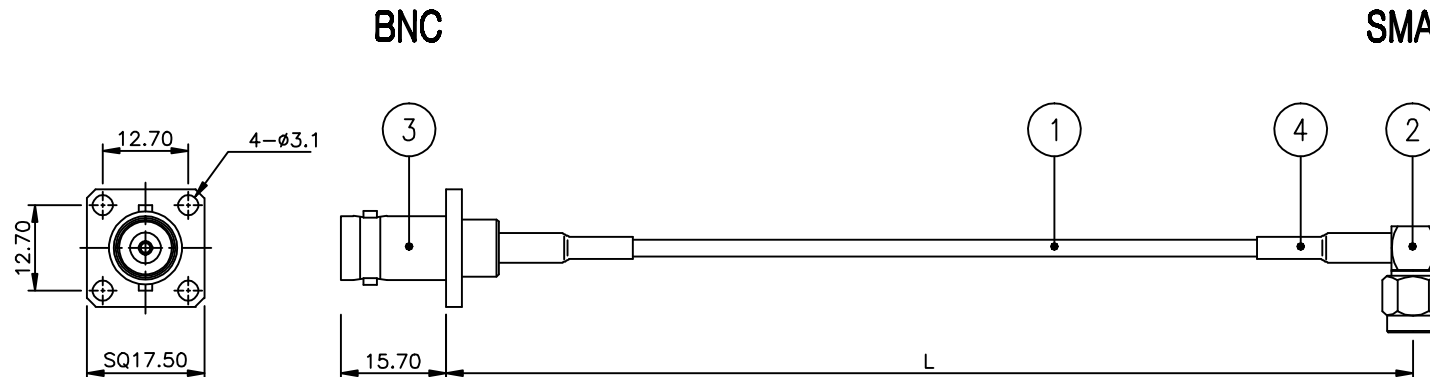

Frequency	DC ~ 3.0GHz
Impedance	50Ω (Nominal)
Insertion Loss	-1.25dB (Min)

Notes

- RoHS & Pb-FREE
- CONNECTOR MATERIAL & FINISHES
 - SMA PL → BODY : BRASS / Gold Plating
CONTACT : BRASS / Gold Plating
COUPLING CAP : BRASS / Nickel Plating
COVER : BRASS / Gold Plating
 - BNC JS-4H → BODY : BRASS / Nickel Plating
CONTACT : BRASS / Gold Plating

Customer Approval Section	
Customer Name	
Approver Name	
Date	
Signature	

CUSTOMER	
CUSTOMER CODE	
CABLE LENGTH TOLERANCE	0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%

4	SHRINK TUBE	2	LS TUBE	ATU00058-N/1	Ø4x20_Black
3	CONNECTOR	1	KJ COMTECH	CN00288-7/1	BNC50 JS-4H
2	CONNECTOR	1	KJ COMTECH	CN00128-7/2	SMA50 PL
1	COAXIAL CABLE	1	EXPANTEL	ACA00048-N/1	RG316(50Ω)_Brown
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS
DATE 2014. 02. 18.			 RF & MICROWAVE TECHNOLOGY TEL : 02-92-947-0015 FAX : 02-92-947-0017 KJ COMTECH CO.,LTD.		
APPROVED BY I.C.KIM		TITLE CABLE ASSEMBLY			
CHECKED BY E.H.KIM					
DRAWN BY M.H.SONG		A4	DWG NO. CF00827-7/1		
CHECKED BY			DETAIL NO.		
SCALE N/S	UNIT mm		REVISION I R SHEET 1 of 1		

A4