


1BOX에 500EA 이상 포장하지 말 것.

MMCX

TNC

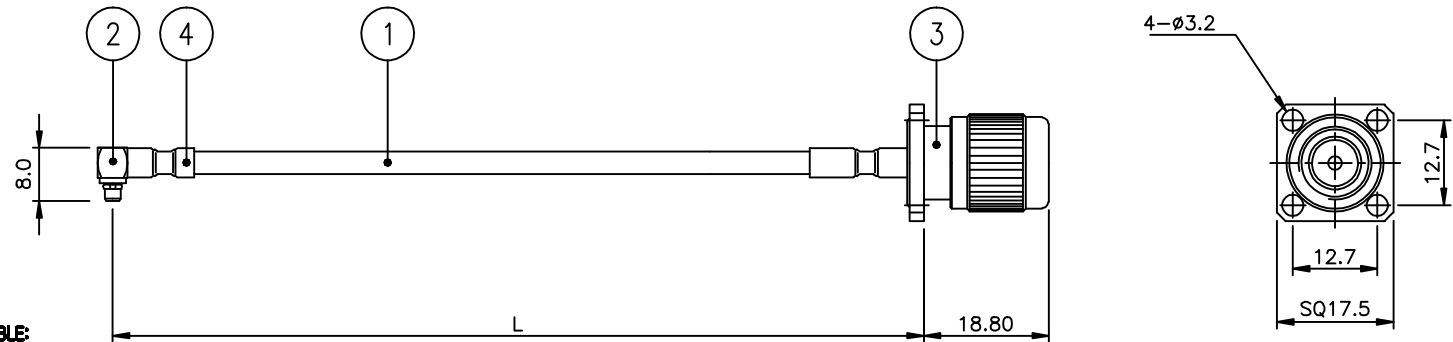

NOTES

1. REQUIREMENTS FOR COAX CABLE:
 - 1.1. IMPEDANCE: 50ohm.
 - 1.2. ELECTRIC STRENGTH: 300V FOR 3min (RMS VALUE FOR AC).
 - 1.3. INSERTION LOSS < 0.4dB at 1.55Ghz
 - 1.4. RETURN LOSS > 14dB at 1.55Ghz
 - 1.5. TEMPERATURE RANGE -40° TO +85°
 - 1.6. MINIMUM BEND RADIUS 10mm
2. PULL OUT FORCE: 8Kg MINIMUM
3. WATER PROOF: IP67
4. ATTACH LAMINATED LABEL WITH PRINTED IN BLACK P/N ON BONDING TUBE.
5. MANUFACTURER SHALL PROVIDE A CERTIFICATE OF COMPLIANCE (COC) WITH RoHS, ALONG WITH DELIVERY.
6. THE Rev. OF CABLE MUST BE THE SAME AS ORDERED.
7. WIRES AND CONNECTORS - PER PART TABLE OR SIMILAR BY CUSTOMER APPROVAL.
8. WIRING: PIN TO PIN ASSIGNMENT.

Packaging:

1. PACKAGING: IN POLYBAG WITH RECYCLE MARKING.
2. Each package must have a part number label.
3. Each package must have RoHS identified on it.
4. All packaging must be sufficient to protect the product during shipment (proof of design may be required).



CONNECTOR FINISHES:

1. MMCX PL ----> BODY : Gold Plated
CONTACT : Gold Plated
2. TNC PS-4H ----> BODY : Nickel Plated
CONTACT : Gold Plated
COUPLING CAP : Nickel Plated

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	M.H.SONG	I.C.KIM	2018.01.09.

4	BONDING TUBE	2	LS TUBE	ATU00004-N/1	Ø4_Black
3	CONNECTOR	1	KJ COMTECH	CN03175-7/1	TNC PS-4H
2	CONNECTOR	1	KJ COMTECH	CN00008-7/1	MMCX PL
1	COAXIAL CABLE	1	EXPANTEL	ACA00039-N/1	85FJ(50Ω)_Blue

NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS	
DATE			2014. 01. 09.			
APPROVED BY	I.C.KIM		 KJ COMTECH CO.,LTD.		RF & MICROWAVE TECHNOLOGY Tel : 82-32-647-6015 Fax : 82-32-647-6017	
CHECKED BY	E.H.KIM					
DRAWN BY	M.H.SONG					
CHECKED BY			TITLE			
			CABLE ASSEMBLY			
SCALE	UNIT		DWG NO.	CF00930-7/1		
N/S	mm		A4	DETAIL NO.		
			REVISION	I	R	SHEET

CUSTOMER
CUSTOMER CODE
CABLE LENGTH TOLERANCE
0 ~ 1000mm : +5, -0
1000 ~ 2000mm : +10, -0
2000 ~ 3000mm : +15, -0
3000 ~ 4000mm : +20, -0
4000 ~ 5000mm : +25, -0
5000 ~ : +10%