


REVISION					
REV	DESCRIPTION	DRAWN	APPR	DATE	
IR	Initial Registration	M.H.SONG	I.C.KIM	2014.05.26.	

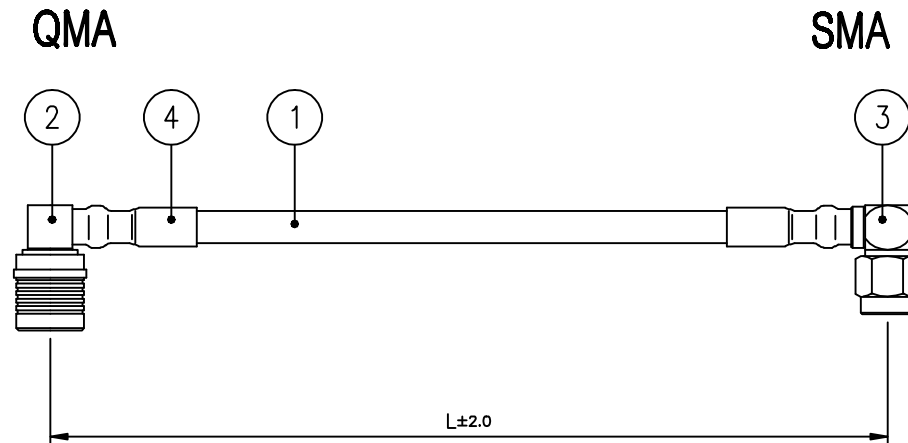

Notes

1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

2-1. KQMA PL → BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

2-2. SMA PL → BODY : Gold Plating
CONTACT : Gold Plating
COUPLING CAP: Nickel Plating

4	BONDING TUBE	1	LS TUBE	ATU00006-N/1	ø6.0_Black
3	CONNECTOR	1	KJ COMTECH	CN03286-7/8	SMA50 PL
2	CONNECTOR	1	KJ COMTECH	CN03280-7/8	KQMA50 PL
1	COAXIAL CABLE		EXPANTEL	ACA00037-N/1	141FJ(50Q)_Blue

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE		2014. 05. 26.	 RF & MICROWAVE TECHNOLOGY Tel : 02-32-947-8815 Fax : 02-32-947-8817		
CUSTOMER CODE	APPROVED BY	I.C.KIM				
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY	-	TITLE CABLE ASSEMBLY			
	DRAWN BY	M.H.SONG				
	CHECKED BY		A4 DWG NO. CF00941-7/1 DETAIL NO. REVISION I R SHEET 1 of 1			
	SCALE	UNIT				
	N/S	mm				

CABLE LENGTH TOLERANCE
 0 ~ 1000mm : +6, -0
 1000 ~ 2000mm : +10, -0
 2000 ~ 3000mm : +15, -0
 3000 ~ 4000mm : +20, -0
 4000 ~ 5000mm : +25, -0
 5000 ~ : +10%