


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	M.H.SONG	I.C.KIM	2014.06.17.

7/16 DIN

N

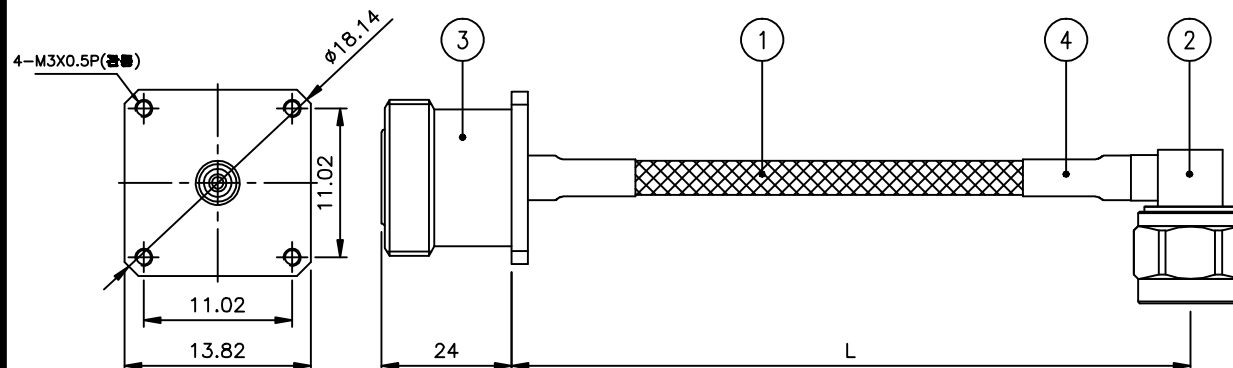

* 전기적 특성

1	Frequency range	DC ~ 3GHz	
2	Impedance	50Ω NOMINAL	
3	V.S.W.R	1.2 : 1 max @ 3GHz	
4	Insertion Loss	-0.3dB min	
5	PIMD-DIN TERM (-43dBm / 2 tone)	CDMA	-153dBc max
		WCDMA	-153dBc max

Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - 2-1. N PS --- ▶▶ BODY : SUCO Plating
CONTACT : Silver Plating
 - 2-2. 7/16DIN JS-4H --- ▶▶ BODY : SUCO Plating
CONTACT : Silver Plating

4	SHRINK TUBE	1	LS TUBE	ATU00064-N/1	ø8.0_Black
3	CONNECTOR	1	KJ COMTECH	CN03238-7/1	7/16DIN50 PS
2	CONNECTOR	1	KJ COMTECH	CN01185-7/3	N50 PL
1	COAXIAL CABLE		EXPANTEL	ACA00033-N/1	250F(50Ω)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS
DATE			2014. 06. 17.		
CUSTOMER CODE			APPROVED BY I.C.KIM		
CABLE LENGTH TOLERANCE			CHECKED BY -		
0 ~ 1000mm : +5, -0			DRAWN BY M.H.SONG		
1000 ~ 2000mm : +10, -0			CHECKED BY		
2000 ~ 3000mm : +15, -0			SCALE N/S		
3000 ~ 4000mm : +20, -0			UNIT mm		
4000 ~ 5000mm : +25, -0			A4		
5000 ~ : +10%			REVISION I R SHEET 1 of 1		



RF & MICROWAVE
TECHNOLOGY
Tel : 82-82-947-8015
Fax : 82-82-947-8017

TITLE CABLE ASSEMBLY

DWG NO. CF00943-7/1

DETAIL NO.

REVISION I R SHEET 1 of 1