


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	M.H.SONG	I.C.KIM	2014. 07. 02.

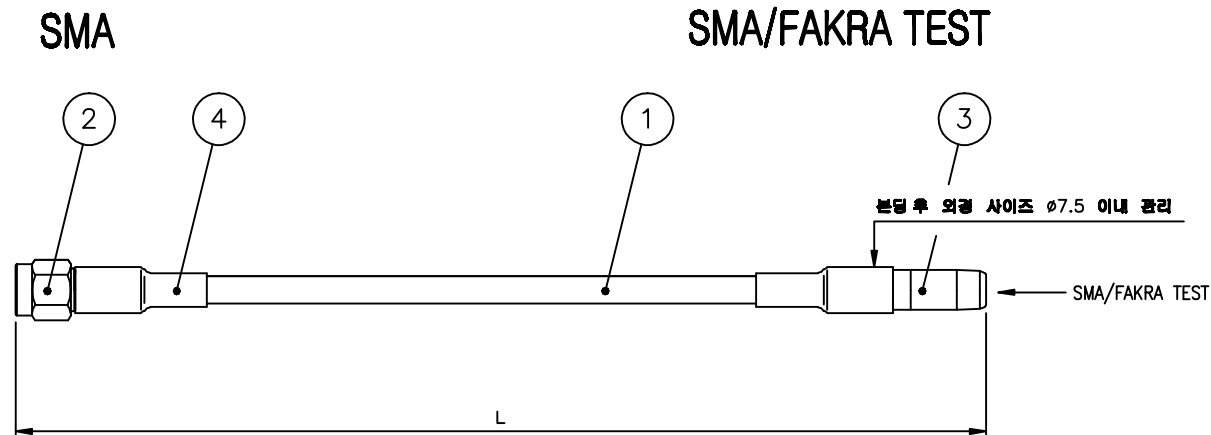

ELECTRICAL SPEC

1. Frequency range : DC~3GHz
2. Impedance : 50ohm Nominal
3. VSWR (Max) : 1.2
4. Insertion Loss (Min) : 0.4dB

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA PS → BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating
 - 2-1. SMB PS → BODY : Gold Plating
CONTACT : Gold Plating
CAP : Gold Plating

4	BONDING TUBE	2	LS TUBE	ATU00341-N/1	Ø6.4-20 Black
3	CONNECTOR	1	KJ COMTECH	CN01757-7/8	SMB50 PS
2	CONNECTOR	1	KJ COMTECH	CN02784-7/1	SMA50 PS
1	COAXIAL CABLE		EXPANTEL FLONTEC	ACA00044-N/1	MF141(50Ω) (BULE)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS
	DATE	2016. 10. 06.				
CUSTOMER CODE	APPROVED BY					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY					
	DRAWN BY	I.C.KIM				
	CHECKED BY					
	SCALE	UNIT				
	N/S	mm				
				 KJ COMTECH CO., LTD. RF & MICROWAVE TECHNOLOGY Tel : 02-55-947-0015 Fax : 02-55-947-0017		
				TITLE CABLE ASS'Y		
				DWG NO.	CF00948-7/1	
				DETAIL NO.		
				REVISION	2	SHEET 1 of 1