


Technical drawing of a SMA rod. The rod is labeled with callouts 1, 2, 3, and 4. Callout 1 points to the main body of the rod. Callout 2 points to the left end fitting. Callout 3 points to the right end fitting. Callout 4 points to a transition section. A dimension line at the bottom indicates the length of the rod is L . The labels **N** and **SMA** are positioned at the top left and top right respectively.

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 2-1. N50 PS →▷ **BODY : Nickel Plating**
CONTACT : Gold Plating
CAP : Nickel Plating
 2-2. SMA50 PS →▷ **BODY : Gold Plating**
CONTACT : Gold Plating
CAP : Gold Plating

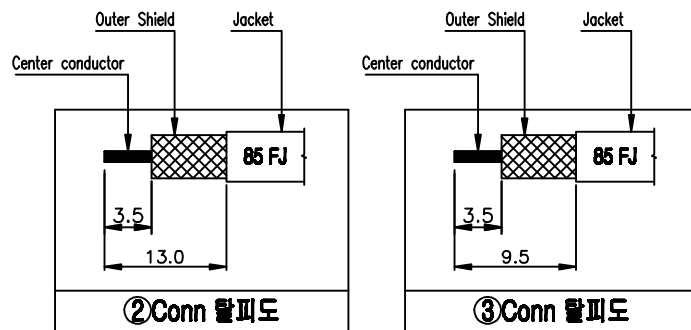

4	BONDING TUBE	2	LS TUBE	ATU00004-N/1	ø4-15 Black
3	CONNECTOR	1	KJ COMTECH	CN02798-7/5	SMA50-PS
2	CONNECTOR	1	KJ COMTECH	CN02757-7/2	N50-PS
1	COAXIAL CABLE	1	EXPANTEL FLONTEC	ACA00036-N/1	85FJ (50Ω) (Clear) [Cable 길이 173mm]
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS
DATE 2016. 03. 23.			 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 02-02-047-0915 Fax : 02-02-047-0917		
APPROVED BY					
CHECKED BY					
DRAWN BY	I.C.KIM				
CHECKED BY		TITLE CABLE ASS'Y			
SCALE	UNIT		A4	DWG NO.	CF00953-7/1
N/S	mm			DETAIL NO.	
			REVISION	I R	SHEET 1 of 1