


REVISION					
REV	DESCRIPTION			DRAWN	APPR
1	Initial Registration			E.H.KIM	I.C.KIM
					2014.10.02

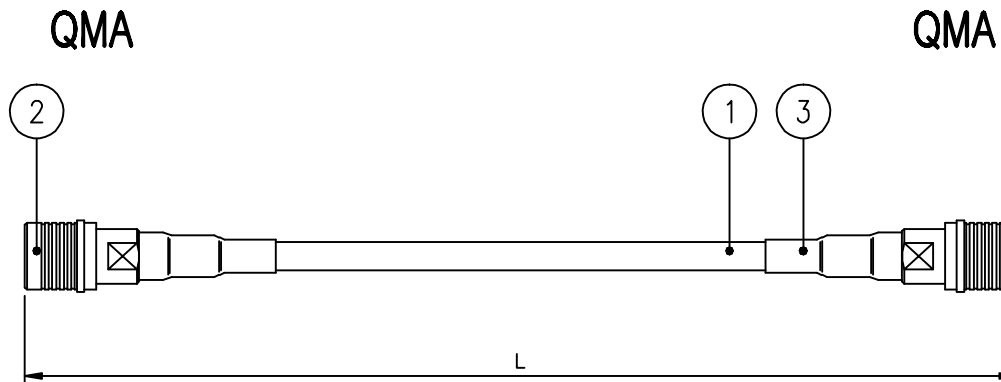

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. QMA PS → BODY : SUCO Plating
CONTACT : Gold Plating
COUPLING CAP : SUCO Plating
3. ELECTRICAL DATA
 - 1) Frequency range : DC~3,000MHz
 - 2) VSWR : 1.2:1 max (21dB RL)
Insertion Loss : -0.75dB min
 - 3) Impedance : 50 Ohms
 - 4) PIMD: -140dBc max (29dBm*2CW tones) CDMA /WCDMA
 - 5) Temperature Range : -40°C to +85°C

3	SHRINK TUBE	2	LS TUBE	ATU00080-N/1	Ø8-20mm Black
2	CONNECTOR	2	KJ COMTECH	CIN01987-7/2	KQMA50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00087-N/1	141F JK (50Ω) Clear

CUSTOMER		NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS
		DATE 2014. 10. 02.			 RF & MICROWAVE TECHNOLOGY Tel : 02-02-047-0015 Fax : 02-02-047-0017		
CUSTOMER CODE		APPROVED BY	I.C.KIM				
		CHECKED BY			TITLE CABLE ASSEMBLY		
		DRAWN BY	E.H.KIM				
		CHECKED BY			DWG NO. CF00960-7/1 DETAIL NO. REVISION I R SHEET 1 of 1		
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%		SCALE N/S	UNIT mm				


 RF & MICROWAVE TECHNOLOGY
 Tel : 82-82-947-8815
 Fax : 82-82-947-8817

TITLE CABLE ASSEMBLY

DWG NO. CF00960-7/1

DETAIL NO.

REVISION I R SHEET 1 of 1