


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	H.J.LEE	I.C.KIM	2015.01.06.

Notes1

- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - 2-1. SMA PS → BODY : Gold Plating
CONTACT : Gold Plating
COUPLING CAP : Nickel Plating
 - 2-2 N50 JB → BODY : Nickel Plating
CONTACT : Gold Plating

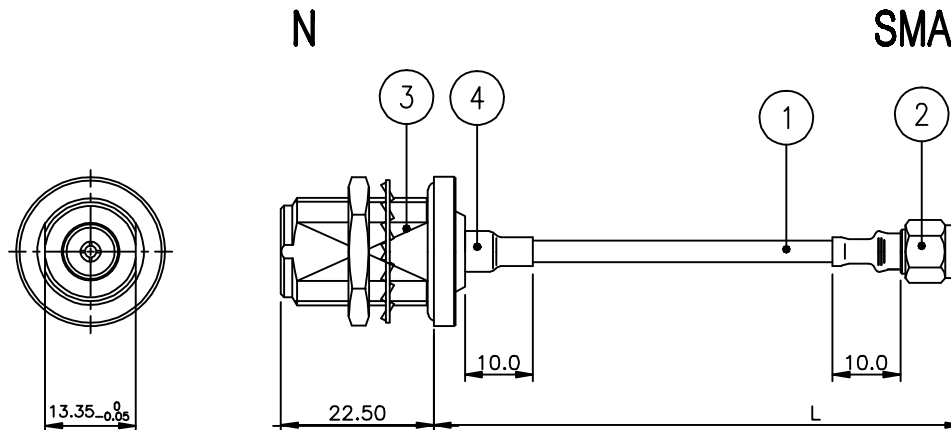

Notes2

- CABLE TYPE:
 - SEMIFLEX 0.086 WITH PTFE JACKET.
- CONNECTORS:
 - SMA PLUG.
 - N-TYPE JACK IP67 (INCLUDE O-RING).
- SHRINK TYPE:
 - RIGID ADHESIVE HEATSHRINK TUBE ,M23053/4-101-0.
- IL < 0.4dB UP TO 6GHz.
- RL > 20dB UP TO 6GHz.
- INCLUDE A PLOT WITH EVERY CABLE:
 - Plot up to 6GHz.
 - Include IL markers at Max(DC-6GHz): 1GHz,2GHz,5GHz,6GHz.
 - Include RL marker at Max(DC-6GHz).
- LABLE : "WIR0494 REV _" ; " SUPPLIER ID" IN THE MIDDLE OF THE CABLE.
- SUPPLIER ID: SEE LABLE REQUIREMENTS NUMBER : CF-QC-056.
- THMPERATURA RANGE-40°C TO +85°C
- Vinyl caps for each connectors

4	BONDING TUBE	2	LS TUBE	ATU00058-IV/1	Ø4_Black
3	CONNECTOR	1	KJ COMTECH	CN02682-7/2	N50 JB
2	CONNECTOR	1	KJ COMTECH	CN00839-7/1	SMA50 PS
1	COAXIAL CABLE	1	EXPANTEL	ACA00039-IV/1	85FJ(50Q)_BLUE

CUSTOMER		NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
		DATE		2015. 01. 06.			
CUSTOMER CODE		APPROVED BY		I.C.KIM			
		CHECKED BY		-			
		DRAWN BY		H.J.LEE			
		CHECKED BY					
CABLE LENGTH TOLERANCE		SCALE		UNIT			
0 ~ 1000mm : +5, -0		N/S		mm			
1000 ~ 2000mm : +10, -0							
2000 ~ 3000mm : +15, -0							
3000 ~ 4000mm : +20, -0							
4000 ~ 5000mm : +25, -0							
5000 ~ : +10%							

KJ COMTECH
RF & MICROWAVE
TECH HOLDING
Tel : 02-82-947-0016
Fax : 02-82-947-0017

TITLE CABLE ASSEMBLY

DWG NO. CF00978-7/1
DETAIL NO.
REVISION I R SHEET 1 of 1

A4