


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.M.LEE	I.C.KIM	2015. 01. 22.

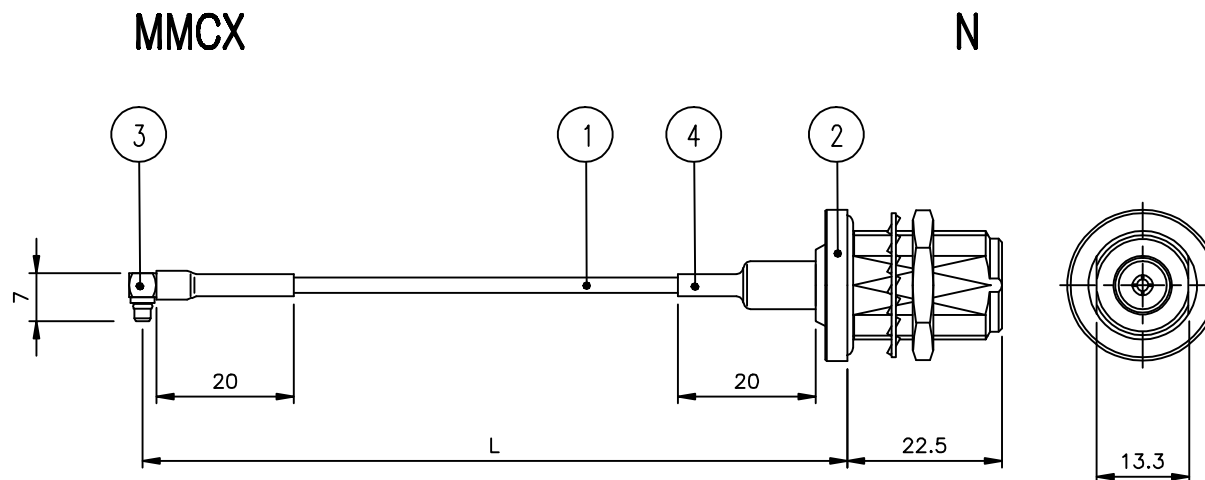

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. N JB -----▶▷BODY : Nickel Plating
CONTACT : Gold Plating
 - 2-2. MMCX PL-----▶▷BODY : Gold Plating
CONTACT : Gold Plating
3. IL < 0.5dB UP TO 6GHz
4. RL > 18dB UP TO 6GHz
5. INCLUDE A PLOT WITH EVERY CABLE
 - 5-1. PLOT UP TO 6GHz
 - 5-2. Include IL markers at Max(DC-6GHz) : 2.4GHz, 5GHz
 - 5-3. Include RL markers at Max(DC-6GHz)
6. CONNECTORS
 1. MMCX PLUG R/A
 2. N-TYPE JACK IP67 (INCLUDE O-RING)
7. TEMPERATURA RANGE -40°C TO+85°C

4	BONDING TUBE	2	LS TUBE	ATU00004-N/1	Ø4-20mm BLACK
3	CONNECTOR	1	KJ COMTECH	CN00905-7/1	MMCX50 PL
2	CONNECTOR	1	KJ COMTECH	CN02882-7/3	N50 JS
1	COAXIAL CABLE		EXPANTEL	ACA00043-N/1	MF86 (BLUE)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS

CUSTOMER	
CUSTOMER CODE	
CABLE LENGTH TOLERANCE	0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%

DATE	2015. 01. 22.
APPROVED BY	I.C.KIM
CHECKED BY	
DRAWN BY	S.M.LEE
CHECKED BY	
SCALE	N/S
UNIT	mm
KJ COMTECH RF & MICROWAVE TECHNOLOGY Tel : 02-02-047-0015 Fax : 02-02-047-0017	
TITLE	
CABLE ASS'Y	
DWG NO.	CF00982-7/1
DETAIL NO.	
REVISION	I R
SHEET	1 of 1

A4