


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	H.J.LEE	I.C.KIM	2015.03.24.

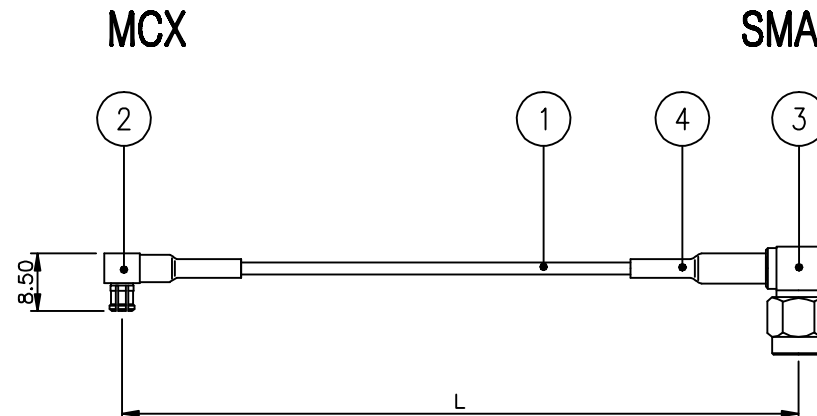

Notes

1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

2-1. MCX PL → BODY : Gold Plate
CONTACT : Gold Plate
CAP : Gold Plate

2-2. SMA PL → BODY : Gold Plate
CONTACT : Gold Plate
CAP : Nickel Plate

4	SHRING TUBE	2	SUMITOMO	ATU00056-N/1	Ø4-Black
3	CONNECTOR	1	KJ COMTECH	CN03408-7/1	SMA50 PL
2	CONNECTOR	1	KJ COMTECH	CN00085-7/2	MCX50 PL
1	COAXIAL CABLE		EXPANTEL	ACA00046-N/1	RQ178(50Q)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS
	DATE 2015. 03. 24.			 RF & MICROWAVE TECHNOLOGY Tel : 02-02-047-0015 Fax : 02-02-047-0017 KJ COMTECH CO.,LTD.		
CUSTOMER CODE	APPROVED BY	I.C.KIM				
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY					
	DRAWN BY	H.J.LEE				
	CHECKED BY					
	SCALE	UNIT				
N/S	mm					
				TITLE CABLE ASSEMBLY	DWG NO.	CF01001-7/1
					DETAIL NO.	
					REVISION	I R SHEET 1 of 1

CABLE LENGTH TOLERANCE
0 ~ 1000mm : +5, -0
1000 ~ 2000mm : +10, -0
2000 ~ 3000mm : +15, -0
3000 ~ 4000mm : +20, -0
4000 ~ 5000mm : +25, -0
5000 ~ : +10%