


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	H.J.LEE	I.C.KIM	2015.04.28.

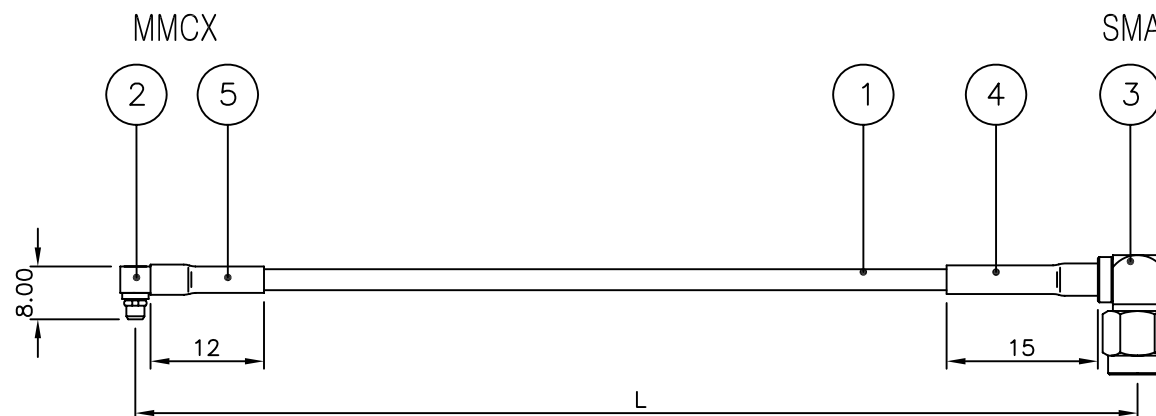



## NOTES

1. REQUIREMENTS FOR COAX CABLE :
  - 1.1. IMPEDANCE : 50ohm.
  - 1.2. ELECTRIC STRENGTH : 300V FOR 3min (RMS VALUE FOR AC).
  - 1.3. INSERTION LOSS ACCORDING TO TABLE 1.
  - 1.4. VSWR = 1.21:1
  - 1.5. TEMPERATURE RANGE -40° TO +85°
  - 1.6. MINIMUM BEND RADIUS 5mm
2. PULL OUT FORCE : 8Kg MINIMUM
3. ATTACH LAMINATED LABEL WITH PRINTEN IN BLACK P/N , REVISION AND MFG CODE.
4. MANUFACTURER SHALL PROVIDE A CERTIFICATE OF COMPLIANCE (COC) WITH RoHS, ALONG WITH DELIVERY.
5. THE Rev. OF CABLE MUST BE THE SAME AS ORDERED.
6. WIRES AND CONNECTORS - PER PART TABLE OR SIMILAR BY CUSTOMER APPROVAL.
7. MINIMUM SMA TORQUE 1NM.

## Packaging:

1. PACKAGING: IN POLYBAG WITH RECYCLE MARKING.
- 2.Each package must have a part number label.
- 3.Each package must have RoHS identified on it.
- 4.All packaging must be sufficient to protect the product during shipment (proof of design may be required).

5	BONDING TUBE	1	SUMITOMO	ATU00004-N/1	Ø4x12_Black
4	BONDING TUBE	1	SUMITOMO	ATU00004-N/1	Ø4x15_Black
3	CONNECTOR	1	KJ COMTECH	CN02748-7/3	SMA50 PL
2	CONNECTOR	1	KJ COMTECH	CN00008-7/1	MMCX50 PL
1	COAXIAL CABLE	1	EXPANTEL	ACA00039-N/1	85FJ(50Ω) - BLUE

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2015. 04. 28.			<div><div>RF &amp; MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017</div></div>		
CUSTOMER CODE	APPROVED BY	I.C.KIM				
	CHECKED BY			TITLE CABLE ASS'Y		
CABLE LENGTH TOLERANCE	DRAWN BY	H.J.LEE				
0 ~ 1000mm : +5, -0	CHECKED BY			A4 <div><div>DWG NO.</div><div>CF01019-7/1</div><div>DETAIL NO.</div><div></div><div>REVISION</div><div>I R</div><div>SHEET</div><div>1 of 1</div></div>		
1000 ~ 2000mm : +10, -0	SCALE	UNIT				
2000 ~ 3000mm : +15, -0						
3000 ~ 4000mm : +20, -0						
4000 ~ 5000mm : +25, -0						
5000 ~ : +10%	N/S	mm				