


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	H.J.LEE	I.C.KIM	2015.08.15.

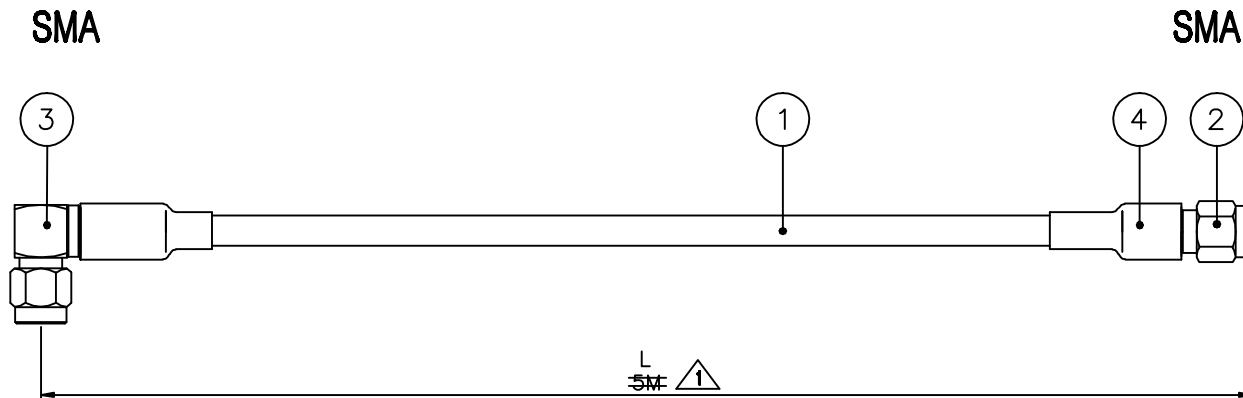



Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES

- 2-1. SMA PS → BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating
- 2-2. SMA PL → BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating

ELECTRICAL DATA :

- IMPEDANCE : 50ohm
- FREQUENCY RANGE : DC~3GHz
- VSWR (Max) : 2.0 @ 1575.42MHz
- INSERTION LOSS (Min) : -12.0dB



CUSTOMER	
CUSTOMER CODE	
CABLE LENGTH TOLERANCE	0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 6000mm : +25, -0 6000 ~ : +10%

4	SHRINK TUBE	2	LS TUBE	ATU00080-N/1	#6 - 20mm Black
3	CONNECTOR	1	KJ COMTECH	CN03454-7/1	SMA50 PL
2	CONNECTOR	1	KJ COMTECH	CN00073-7/2	SMA50 PS
1	COAXIAL CABLE	1	TIMES	ACA00906-N/1	LMP200(500) Black 케이블 길이 1980mm
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS

DATE	2017. 01. 18.
APPROVED BY	I.C.KIM
CHECKED BY	C.K.KIM
DRAWN BY	G.Y.KIM
CHECKED BY	
SCALE	N/S
UNIT	mm
KJ COMTECH RF & MICROWAVE TECHNOLOGY Tel : 02-02-047-0016 Fax : 02-02-047-0017	
TITLE CABLE ASS'Y	
DWG NO.	CF01025-7/1
DETAIL NO.	
REVISION	3
SHEET	1 of 1

A4