
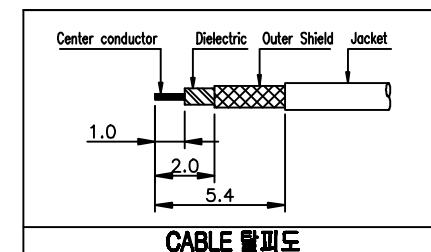


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	H.J.LEE	I.C.KIM	2015.08.24.

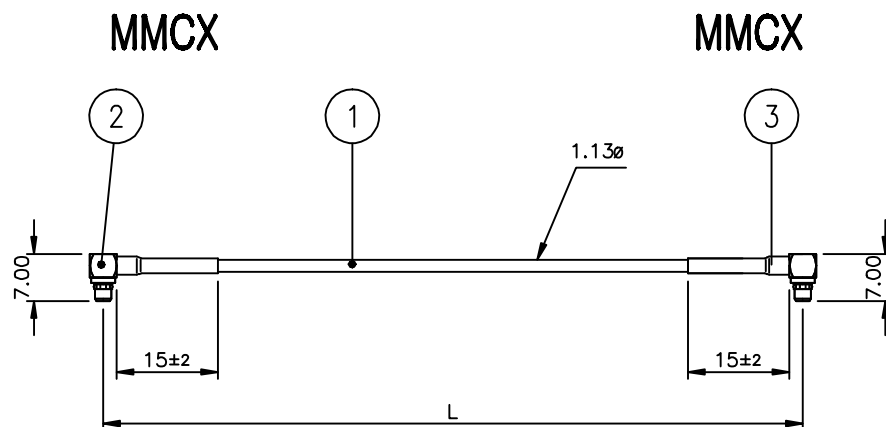

NOTES

1. REQUIREMENTS FOR COAX CABLE :

- 1.1. IMPEDANCE : 50ohm.
- 1.2. ELECTRIC STRENGTH : 300V FOR 3min (RMS VALUE FOR AC).
- 1.3. INSERTION LOSS : 0.8dB at 6.0GHz.
- 1.4. VSWR = 1.21:1
- 1.5. TEMPERATURE RANGE -40° TO +85°
- 1.6. MINIMUM BEND RADIUS 5mm

CUSTOMER	
CUSTOMER CODE	
CABLE LENGTH TOLERANCE	
0 ~ 1000mm	: +5, -0
1000 ~ 2000mm	: +10, -0
2000 ~ 3000mm	: +15, -0
3000 ~ 4000mm	: +20, -0
4000 ~ 5000mm	: +25, -0
5000 ~	: +10%

3	BONDING TUBE	2	LS TUBE	ATU00004-N/1	Ø4-15mm Black
2	CONNECTOR	2	KJ COMTECH	CN03438-7/1	MMCX50 PL
1	COAXIAL CABLE	1	EXPANTEL	ACA00390-N/1	
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS
DATE			2015. 08. 24.		
APPROVED BY			I.C.KIM		
CHECKED BY			S.M.LEE		
DRAWN BY			H.J.LEE		
CHECKED BY					
SCALE		UNIT	mm		
N/S					
			TITLE CABLE ASS'Y		
A4			DWG NO.		CF01027-7/1
			DETAIL NO.		
			REVISION		
			I	R	SHEET
			1 of 1		