

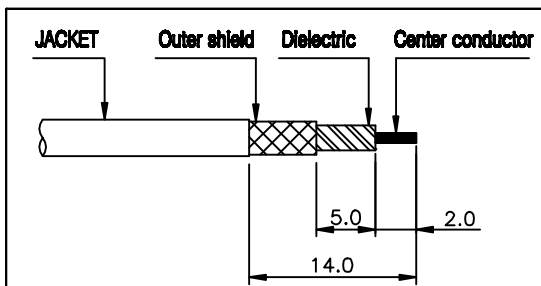


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.M.LEE	I.C.KIM	2015.10.14.

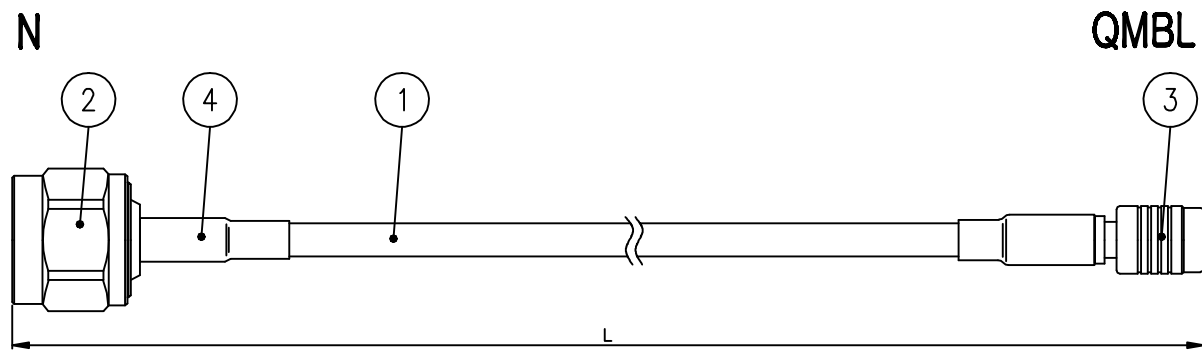

3번 Conn CABLE 할피도

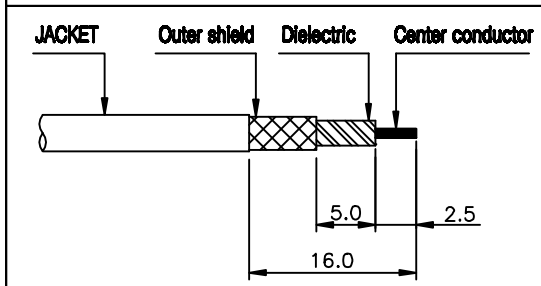

2번 Conn CABLE 할피도

MARKER(MHz)	Insertion Loss(S21) ※Loss 편차 ±0.05 이내
700	-0.55±0.05
800	-0.61±0.05
900	-0.64±0.05
1400	-0.86±0.05
1700	-0.97±0.05
2300	-1.17±0.05
2500	-1.23±0.05
2600	-1.26±0.05

Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - 2-1. N50 PS → BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating
 - 2-2. QMBL50 PS → BODY : Nickel Plating
CONTACT : Gold Plating
CAP : ACETAL

4	SHRINK TUBE	2	LS TUBE	ATU00080-N/1	ø6 Black - 20mm
3	CONNECTOR	1	KJ COMTECH	CN03489-7/1	QMBL50-PS
2	CONNECTOR	1	KJ COMTECH	CN02805-7/1	N50-PS
1	COAXIAL CABLE	1	EXPANTEL	ACA00058-N/1	RG400(50Ω)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS

CUSTOMER		DATE		2015. 10. 14.	
CUSTOMER CODE		APPROVED BY		I.C.KIM	
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%		CHECKED BY		H.J.LEE	
		DRAWN BY		S.M.LEE	
		CHECKED BY			
SCALE		UNIT		1/1	

KJ COMTECH
RF & MICROWAVE TECHNOLOGY
Tel : 02-02-007-0016
Fax : 02-02-007-0017

KJ COMTECH CO., LTD.

TITLE: CABLE ASS'Y

A4

DWG NO.	CF01038-7/1
DETAIL NO.	
REVISION	I R SHEET 1 of 1