



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.M.LEE	I.C.KIM	2015.10.14.
1	SMBL JS 커넥터 삽입물과 유격 개선 제품 코드 변경	I.C.KIM		2016.10.31.

SMBL

QMBL

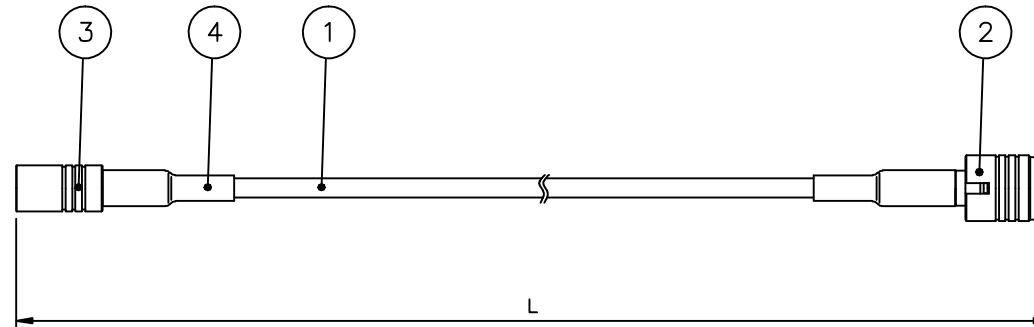

MARKER(MHz)	Insertion Loss(S21) ※Loss 편차 ±0.05 이내
700	-0.19±0.05
800	-0.20±0.05
900	-0.21±0.05
1400	-0.29±0.05
1700	-0.35±0.05
2300	-0.49±0.05
2500	-0.45±0.05
2600	-0.52±0.05

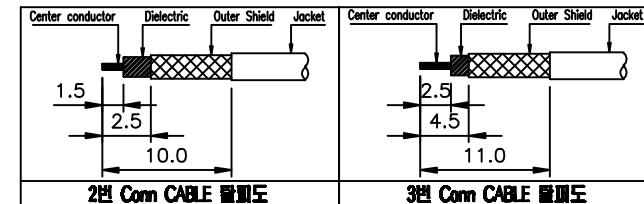

4	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	Ø4 Black - 20mm
3	CONNECTOR	1	KJ COMTECH	CN03557-7/1 CN03498-7/1	QMBL-JS
2	CONNECTOR	1	KJ COMTECH	CN03498-7/1	QMBL-PS
1	COAXIAL CABLE		FUJIKURA	ACA00210-N/1	FUJIKURA EH-1.8D-H2EW (SHIELD DIAMETER 20mm)

NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS
DATE			2016. 10. 31.		
APPROVED BY			 RF & MICROWAVE TECHNOLOGY Tel : 02-42-247-2015 Fax : 02-42-247-2017		
CHECKED BY					
DRAWN BY			TITLE		
CHECKED BY			CABLE ASS'Y		
SCALE			A4		
UNIT			DWG NO.		CF01040-7/1
N/S			DETAIL NO.		
mm			REVISION		1
			SHEET		1 of 1

Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - 2-1. QMBL50 PS → BODY : Nickel Plating
CONTACT : Gold Plating
CAP : PBT (Material)
 - 2-2. QMBL50 JS → BODY : Nickel Plating
CONTACT : Gold Plating

CUSTOMER	
CUSTOMER CODE	
CABLE LENGTH TOLERANCE	
0 ~ 1000mm : +5, -0	
1000 ~ 2000mm : +10, -0	
2000 ~ 3000mm : +15, -0	
3000 ~ 4000mm : +20, -0	
4000 ~ 5000mm : +25, -0	
5000 ~ : +10%	