
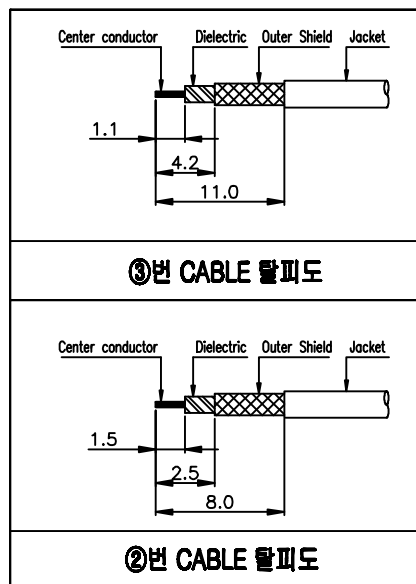


REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	H.J.LEE	I.C.KIM	2015.09.15.
1	KMS156(1.35t) 원선 및 특성 개선 커넥터 변경	I.C.KIM		2015.10.23.
2	KMS156(1.35t) 특성 개선 커넥터 변경	S.M.LEE	I.C.KIM	2015.11.27.

KMS-156

SMBL

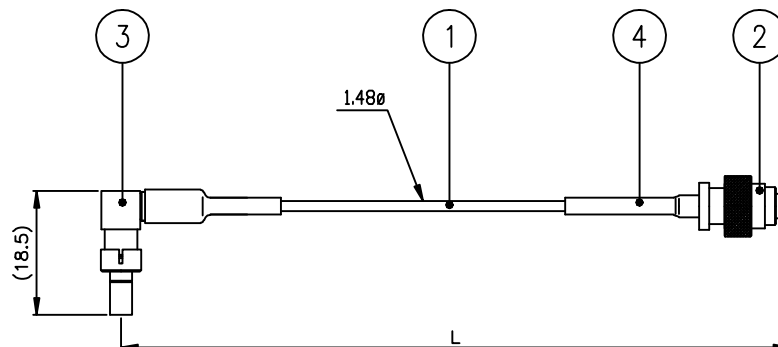

Notes

1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

- 2-1. SMBL50 PS → BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating
- 2-2. KMS-156 (0.35t) PL → BODY : Nickel Plating
CONTACT : Gold Plating

4	SHRINK TUBE	2	LS TUBE	ATU00054-N/1	#3 - Black
3	CONNECTOR	1	KJ COMTECH	CN08480-7/4 CN08480-7/2	KMS-156(1.35t)PL
2	CONNECTOR	1	KJ COMTECH	CN08489-7/1	SMBL50 PS
1	COAXIAL CABLE	1		ACA00123-N/1	HITACHI 1X30AWG(7/0.102)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2015. 11. 27.			 RF & MICROWAVE TECHNOLOGY Tel : 02-02-947-0915 Fax : 02-02-947-0917 KJ COMTECH CO.,LTD.		
CUSTOMER CODE	APPROVED BY	I.C.KIM				
	CHECKED BY	H.J.LEE				
CABLE LENGTH TOLERANCE 0 ~ 50mm : +0.5 ~ -0.5 50 ~ 200mm : +1.0 ~ -1.0 100 ~ 500mm : +2.0 ~ -2.0 200 ~ 500mm : +3.0 ~ -3.0 Bending Angle : -1.0° ~ -3.0°	DRAWN BY	S.M.LEE				
	CHECKED BY					
	SCALE	UNIT				
1/1				TITLE CABLE ASS'Y		
A4				DWG NO.	CA07594-7/1	
				DETAIL NO.		
				REVISION	2	SHEET