
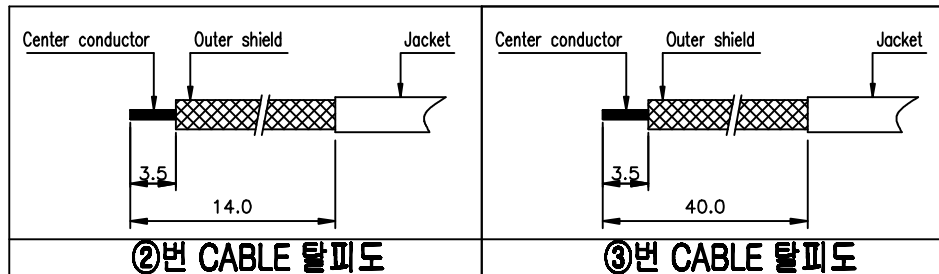


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	H.J.LEE	I.C.KIM	2015.10.02.

4.1/9.5DIN

N

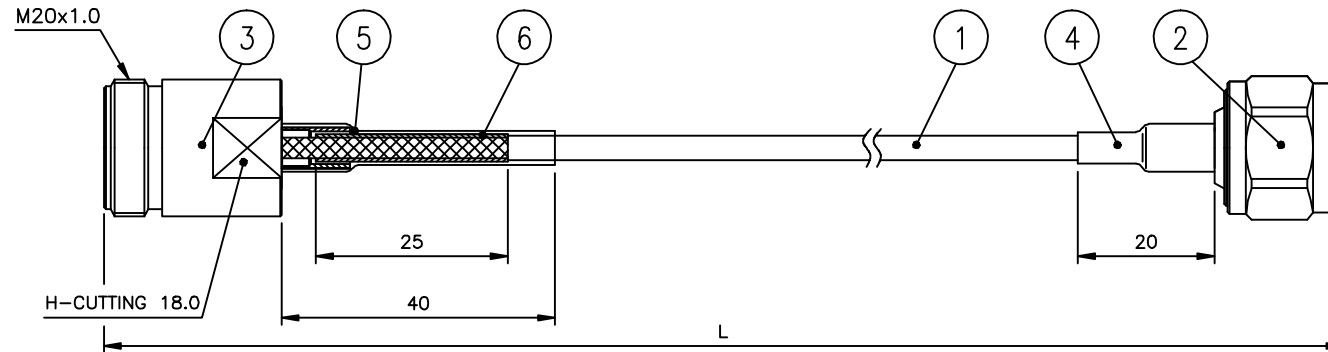

* CABLE TUBE 방법

- ③번 CABLE 탈피 된 Outer shield 위에 ⑥번 SHRINK TUBE를 씌운다.
- SHRINK TUBE 된 CABLE 위에 FERRULE를 씌운다.
- FERRULE 를 압착하지 않은 상태에서 BONDING TUBE로 수축한다.

6	SHRINK TUBE	1	LS TUBE	ATU00080-N/1	φ6-25mm (Black)
5	BONDING TUBE	1	LS TUBE	ATU00008-N/1	φ6-40mm (Black)
4	BONDING TUBE	1	LS TUBE	ATU00008-N/1	φ6-20mm (Black)
3	CONNECTOR	1	KJ COMTECH	CN03494-7/1	4.1/9.5 DIN50-JS
2	CONNECTOR	1	KJ COMTECH	CN02753-7/4	N50-PS
1	COAXIAL CABLE		EXPANTEL	ACA00040-N/2	141FJ (50Ω)-BLUE

Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - 2-1. N PS —> BODY : SUCO Plating
CONTACT : Silver Plating (3μm)
COUPLING CAP : SUCO Plating
 - 2-2. 4.1/9.5 DIN50-JS —> BODY : SUCO Plating
CONTACT : Silver Plating (3μm)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS									
	DATE	2015. 10. 02.		 RF & MICROWAVE TECHNOLOGY Tel : 02-02-047-0015 Fax : 02-02-047-0017											
CUSTOMER CODE	APPROVED BY	I.C.KIM		TITLE CABLE ASS'Y											
	CHECKED BY	S.M.LEE													
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	H.J.LEE		A4 <table><tr><td>DWG NO.</td><td colspan="2">CF01043-7/1</td></tr><tr><td>DETAIL NO.</td><td colspan="2"></td></tr><tr><td>REVISION</td><td>I R</td><td>SHEET 1 of 1</td></tr></table>			DWG NO.	CF01043-7/1		DETAIL NO.			REVISION	I R	SHEET 1 of 1
	DWG NO.	CF01043-7/1													
	DETAIL NO.														
	REVISION	I R	SHEET 1 of 1												
SCALE	UNIT														
	N/S	mm													