


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	H.J.LEE	I.C.KIM	2015.11.11.

4.1/9.5 DIN


SMA

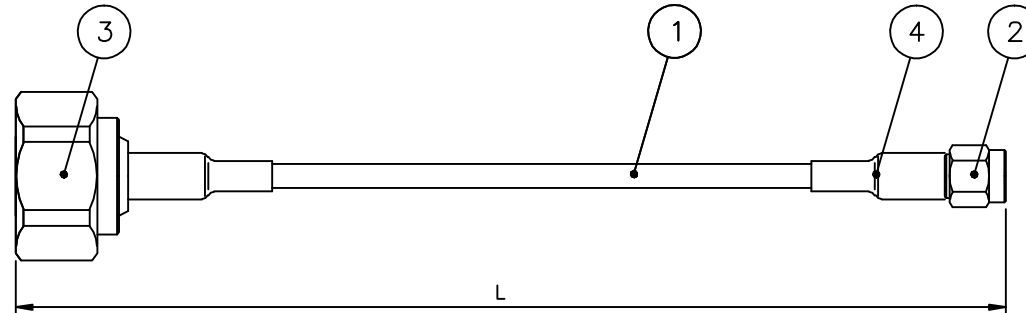

Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - 2-1.4.1/9.5 DIN PS → BODY : SUCO Plating
CONTACT : Silver Plating (5μ)
CAP : SUCO Plating
 - 2-2.SMA PS → BODY : SUCO Plating
CONTACT : Silver Plating (3μ)
CAP : SUCO Plating

- * ②,③번 CONNECTOR FERRULE 밀어 넣고 압착이 아닌 SHRINK TUBE로 고정
- * Passive IMD (Max.) : -140dBc (@43dBm 2tone - CDMA/WCDMA 장비 기준)

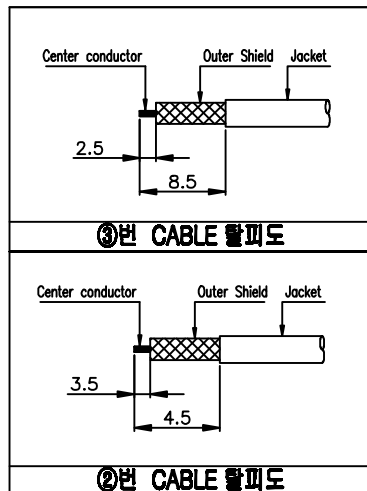

4	SHRINK TUBE	2	LS TUBE	ATU00060-N/1	ø6 -20mm BLACK
3	CONNECTOR	1	KJ COMTECH	CN03523-7/3 CN03523-7/1	4.1/9.5 DIN50-PS
2	CONNECTOR	1	KJ COMTECH	CN02764-7/2	SMA50-PS
1	COAXIAL CABLE		EXPANTEL	ACA00040-N/1	141FJ(50Ω)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS
	DATE	2016. 02. 19.		 RF & MICROWAVE TECHNOLOGY Tel : 02-92-947-8915 Fax : 02-92-947-8917		
CUSTOMER CODE	APPROVED BY	I.C.KIM	CHECKED BY	TITLE		
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	H.J.LEE	CHECKED BY	CABLE ASS'Y		
	SCALE	N/S	UNIT	A4		
		mm		DWG NO.	CF01056-7/1	
				DETAIL NO.		
				REVISION	1	SHEET 1 of 1