


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	H.J.LEE	I.C.KIM	2015.11.24.

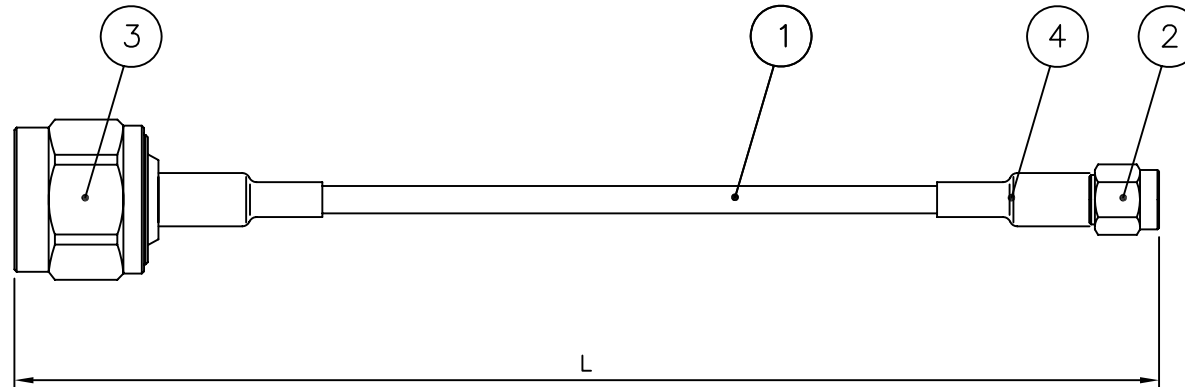


- * ②,③번 CONNECTOR FERRULE 밀어 놓고 압착이 아닌 SHRINK TUBE로 고정
- * Passive IMD (Max.) : -140dBc (@43dBm 2tone - CDMA/WCDMA 장비 기준)

ELECTRICAL DATA

1. IMPEDANCE : 50ohm (Nominal)
2. Frequency Range : DC~6GHz
3. VSWR(Max) : 1.2

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1.N PS-----▶ BODY : SUCO Plating
CONTACT : Silver Plating (3μm)
CAP : SUCO Plating
 - 2-2.SMA PS-----▶ BODY : SUCO Plating
CONTACT : Silver Plating (3μm)
CAP : SUCO Plating

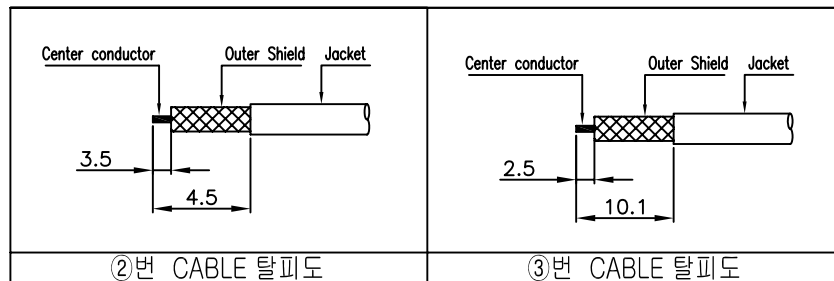

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE	2015. 11. 24.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	CUSTOMER CODE	APPROVED BY	I.C.KIM			
	CABLE LENGTH TOLERANCE	CHECKED BY	S.M.LEE			
		DRAWN BY	H.J.LEE	TITLE		
		CHECKED BY		A4	DWG NO.	CF01057-7/1
	SCALE	UNIT	mm		DETAIL NO.	
					REVISION	I R SHEET 1 of 1