


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	H.J.LEE	L.C.KIM	2016.01.08

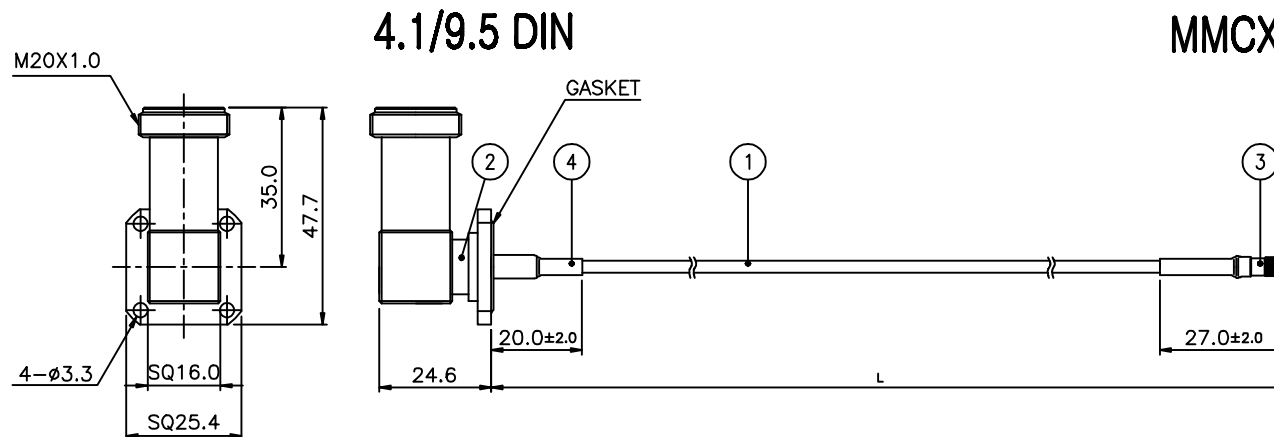

Notes

MECHANICAL REQUIREMENT:

- PULL OUT FORCE : 8Kg MINIMUM
- ATTACH LAMINATED LABEL WITH PRINTED P/N, Rev & MFG ON BONDING TUBE.
- THE Rev. OF CABLE MUST BE THE SAME AS ORDERED.
- WIRES AND CONNECTORS - PER PART TABLE
- ALL MATERIALS AND FINISHES SHOULD COMPLY WITH UL 94-V0: UL 80950 AND EN 60950 STANDARDS.
- ALL MATERIALS MUST MEET EU DIRECTIVE 2011/65/EC (RoHS), CHINA SJ/T 11363-2006 (CHINA-RoHS) & EU REGULATION (EC) 1907/2006 (REACH).
- MATERIAL FOR DIN CONNECTOR: BRASS. PLATING: CuSnZn.
- APPLY WELDING PROCESS, ALL AROUND.
- CABLE MUST COMPLY WITH IP67 SEALING TEST PROCEDURE.
- BREAK ALL SHARP EDGES. NO SHARP EDGES ARE ALLOWED.
- SILICONE GASKET, MINIMUM ID=15.5MM.


QA REQUIREMENT:

- STD requirements Implementation IPC/WHMA-A-620 Class II
- MANUFACTURER SHOULD PROVIDE A CERTIFICATE OF COMPLIANCE (COC) WITH RoHS, ALONG WITH DELIVERY.

PACKAGE REQUIREMENT:

- PACKAGING: IN POLYBAG WITH RECYCLE MARKING.
- Each package must have a part number label.
- Each package must have RoHS identified on it.
- All packaging must be sufficient to protect the product during shipment (proof of design may be required).

* ②번 CONNECTOR FERRULE 밑에 놓고 압착이 아닌 BONDING TUBE로 고정

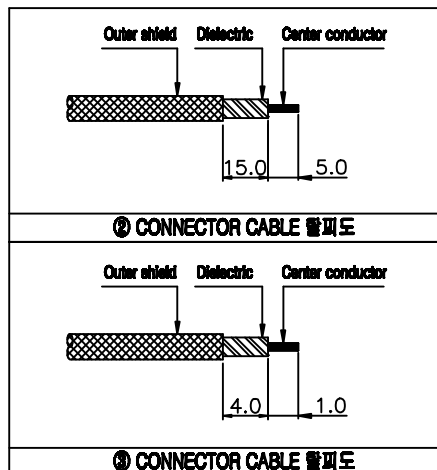

4	BONDING TUBE	2	LS TUBE	ATU00804-W1	ø4x20 (Black)
3	CONNECTOR	1	KJ COMTECH	CN00001-7/1	MMCX030 PB
2	CONNECTOR	1	KJ COMTECH	CN00005-7/1	4.1/9.5 DIN030 JL-01
1	COAXIAL CABLE		EXPANTEL	ACH00000-W1	0801 0805 SHIELD

CUSTOMER	NO.	DESCRIPTION	QTY	VENDOR	PART NO.	REMARKS
	DATE	2016. 01. 08.				
CUSTOMER CODE	APPROVED BY	L.C.KIM				
CABLE LENGTH TOLERANCE	CHECKED BY	H.J.LEE				
0 ~ 100mm ± 0.5	DRAWN BY					
100 ~ 200mm ± 0.5	CHECKED BY					
200 ~ 300mm ± 0.5	SCALE	N/S	UNIT	mm		
300 ~ 400mm ± 0.5						
400 ~ 500mm ± 0.5						
500 ~ 600mm ± 0.5						

TITLE	CABLE ASS'Y
DWG NO.	CF01085-7/1
DETAIL NO.	
REVISION	1 R
SHEET	1 of 1