


REVISION					
No.	DESCRIPTION	REV	DRAWN	APPR	DATE
IR	Initial Registration	IR	C.K.KIM	I.C.KIM	2016. 07. 25.

SMBL

SMBL

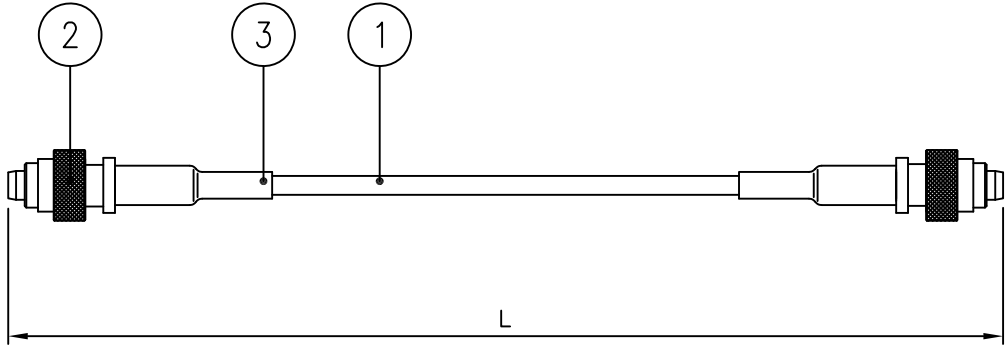


ELECTRICAL DATA :

- 1. IMPEDANCE : 50ohm
- 2. FREQUENCY RANGE : DC~5.8GHz
- 3. VSWR (Max) : 1.35

Notes

- 1. RoHS & Pb-FREE
- 2. CONNECTOR FINISHES
 - 2-1. SMBL PS-----▷▷ BODY : Nickel Plating
 - CONTACT : Gold Plating
 - CAP : Nickel Plating

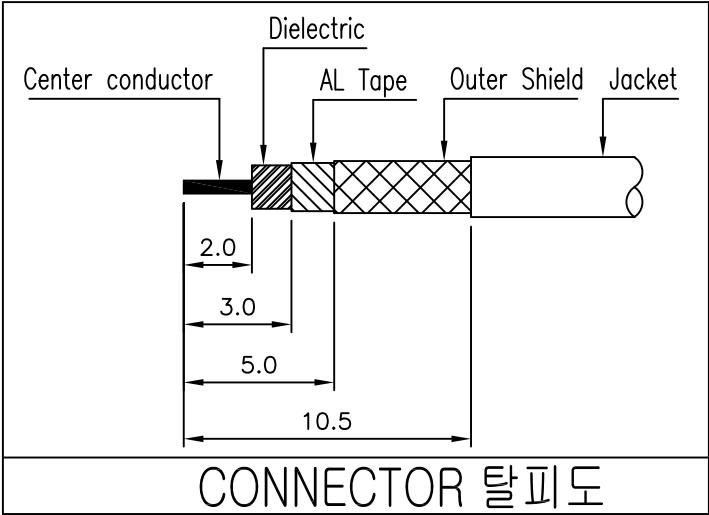

CUSTOMER	3	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	Ø4-20mm BLACK
	2	CONNECTOR	2	KJ COMTECH	CN02826-7/6	SMBL50 PS
	1	COAXIAL CABLE		EXPANTEL	ACA00187-N/1	SIFS 1C(50Ω)_BLACK
CUSTOMER CODE	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE			2016. 07. 25.		
	APPROVED BY			I.C.KIM		
CABLE LENGTH TOLERANCE	CHECKED BY			H.J.LEE		
	DRAWN BY			C.K.KIM		
	CHECKED BY					
SCALE		UNIT		TITLE		
N/S		mm		CABLE ASS'Y		
A4				DWG NO.	CF01086-7/1	
				DETAIL NO.		
				REVISION	I R	SHEET 1 of 1
CABLE LENGTH TOLERANCE		RF & MICROWAVE TECHNOLOGY				
0 ~ 1000mm : +5, -0		Tel : 82-32-347-8015				
1000 ~ 2000mm : +10, -0		Fax : 82-32-347-8017				
2000 ~ 3000mm : +15, -0						
3000 ~ 4000mm : +20, -0						
4000 ~ 5000mm : +25, -0						
5000 ~ : +10%						