



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	C.K.KIM	I.C.KIM	2016.11.11.

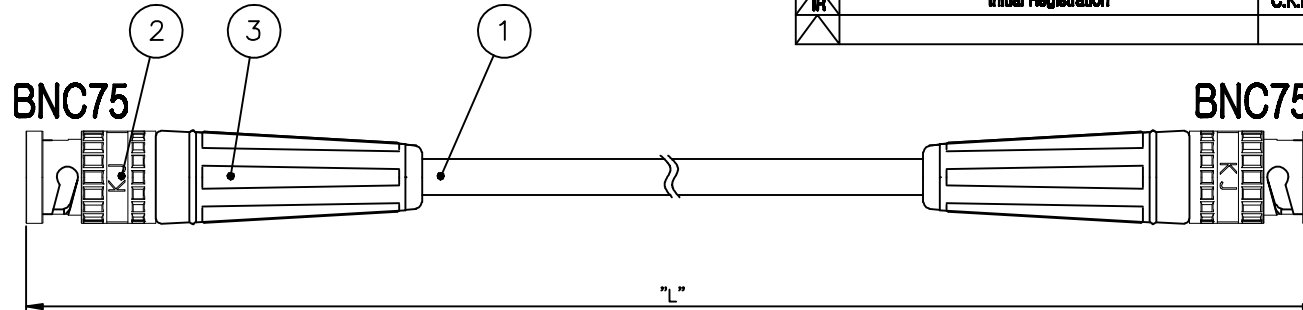

SLEEVE 작업방법


1. SHRINK TUBE 작업이 끝난 후 CONNECTOR 'A'면을 바닥에 붙인다.
2. JABARA SLEEVE를 위에서 아래로 눌러 조립한다.

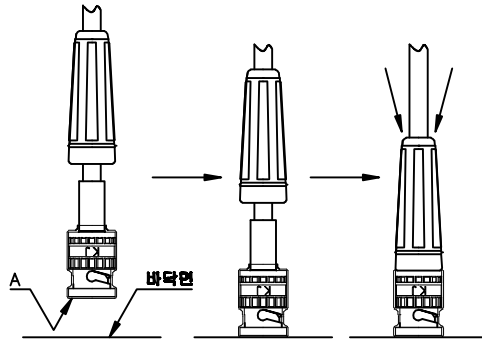

*CABLE 특성 및 길이 2Page 참조.

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. BNC75 PS → BODY : Nickel Plating
 - CONTACT : Gold Plating
 - CAP : Nickel Plating

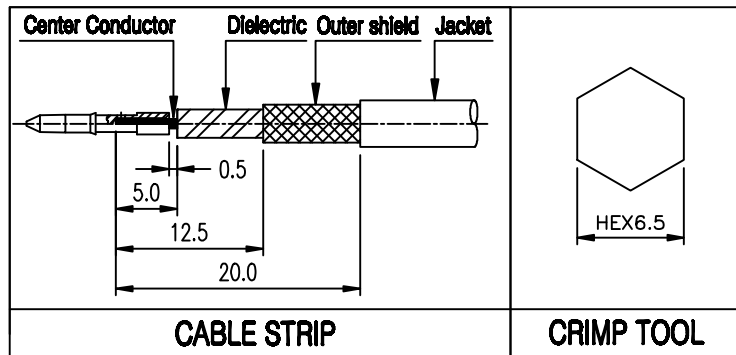

	3	SLEEVE	2	타일레스	DGK00298-N/1	PVC (BLACK)
	2	CONNECTOR	2	KJ COMTECH	CN09599-7/3	BNC75-PS
	1	COAXIAL CABLE	1	COAX PARK	ACA00428-N/1	3C-2V8(75Ω)-Black
CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS
	DATE			2016. 12. 09.		
CUSTOMER CODE	APPROVED BY		 RF & MICROWAVE TECHNOLOGY TEL : 82-82-947-8916 Fax : 82-82-947-8917			
	CHECKED BY					
CABLE LENGTH TOLERANCE	DRAWN BY		I.C.KIM		TITLE CABLE ASS'Y	
	CHECKED BY					
	SCALE		UNIT			
	1/1		mm			
0 ~ 1000mm : +5, -0						
1000 ~ 2000mm : +10, -0						
2000 ~ 3000mm : +15, -0						
3000 ~ 4000mm : +20, -0						
4000 ~ 5000mm : +25, -0						
5000 ~ : +10%						
				A4		
				DWG NO.		
				CF01094-7/1		
				DETAIL NO.		
				REVISION		
				1		
				SHEET		
				1 of 1		

CABLE LENGTH TOLERANCE
 0 ~ 1000mm : +5, -0
 1000 ~ 2000mm : +10, -0
 2000 ~ 3000mm : +15, -0
 3000 ~ 4000mm : +20, -0
 4000 ~ 6000mm : +25, -0
 6000 ~ : +10%