



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	C.K.KIM	I.C.KIM	2018.11.11.

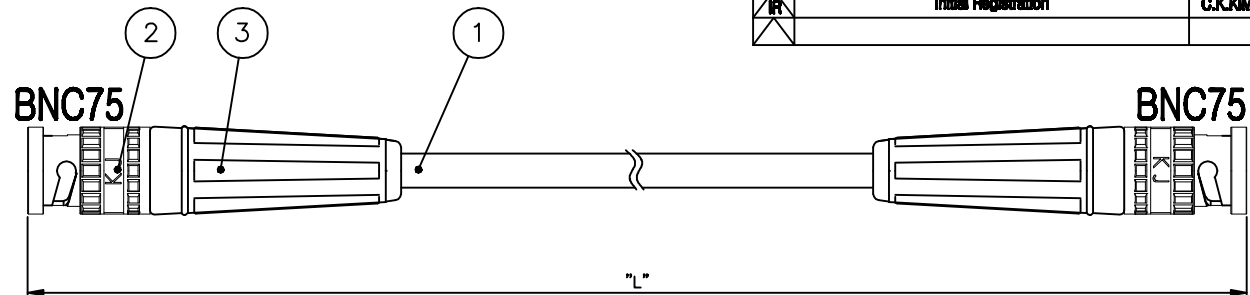

SLEEVE 작업방법


1. SHRINK TUBE 작업이 끝난 후 CONNECTOR 'A'면을 바닥에 붙인다.
2. JABARA SLEEVE를 위에서 아래로 눌러 조립한다.

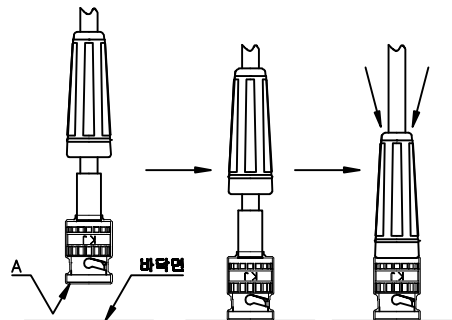

*CABLE 특성 및 길이 2Page 참조.

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. BNC75 PS → BODY : Nickel Plating
 - CONTACT : Gold Plating
 - CAP : Nickel Plating

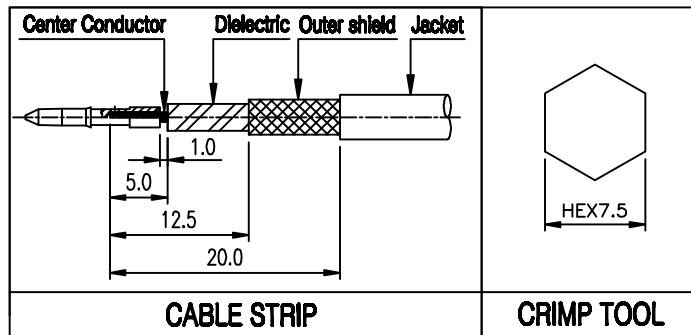

CABLE LENGTH TOLERANCE	
0 ~ 1000mm	: +6, -0
1000 ~ 2000mm	: +10, -0
2000 ~ 3000mm	: +15, -0
3000 ~ 4000mm	: +20, -0
4000 ~ 5000mm	: +25, -0
5000 ~	: +10%

3	SLEEVE	2	터벨레스	DGK00293-N/1	PVC (BLACK)
2	CONNECTOR	2	KJ COMTECH	CN09690-7/1	BNC75-PS
1	COAXIAL CABLE	1	COAX PARK	ACA00428-N/1	50-2VS(75Ω)-Black
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS
DATE			2016. 12. 09.		
APPROVED BY					
CHECKED BY					
DRAWN BY			I.C.KIM		
CHECKED BY					
SCALE		UNIT			
1/1		mm			
TITLE			CABLE ASS'Y		
DWG NO.			CF01095-7/1		
DETAIL NO.					
REVISION			1	SHEET 1 of 1	