


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	H.J.LEE	I.C.KIM	2016.07.22.




Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - MCX50 PL --> BODY : Gold Plating
CONTACT : Gold Plating

- * CABLE (COAX-1.5DHQ)
 - CENTER CONDUCTOR : COPPER
NOMINAL DIAMETER : 0.54mm
 - DIELECTRIC : PE
NOMINAL DIAMETER : 1.6mm
 - SHIELD : #1 ALUMINUM TAPE
#2 TINNED COPPER / 95%
 - JACKET : PVC
NOMINAL DIAMETER : 3.0±0.05mm
- Operating Temperature Rating
 - 20°C to +85°C (PVC)
 - Min. Bend Radius : 13.5mm
- NOM. ATTENUATION
 - 10MHz : 95dB/km
 - 30MHz : 145dB/km
 - 200MHz : 350dB/km
 - 800MHz : 725dB/km
 - 1500MHz : 1045dB/km
 - 2400MHz : 1370dB/km
 - 2600MHz : 1450dB/km
 - 5800MHz : 2450dB/km

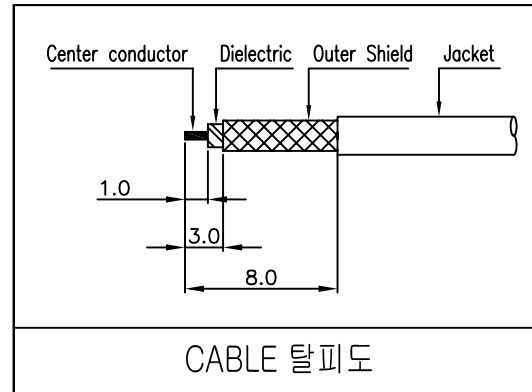

- * ELECTRICAL SPECIFICATIONS
- Impedance : 50Ω
- Frequency Range : DC~3GHz
- V.S.W.R (MAX) : 1.2

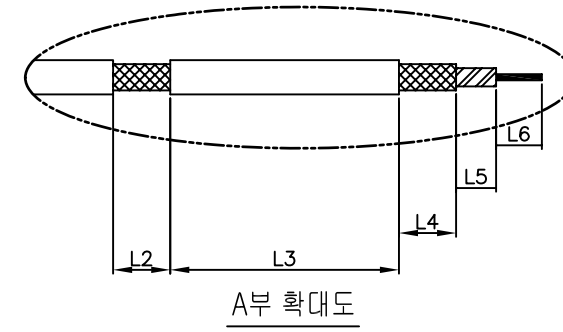

3	SHRINK TUBE	1	LS TUBE	ATU00212-N/1	Φ4x20 (WHITE)
2	CONNECTOR	1	KJ COMTECH	CN03612-7/1	MCX50-PL
1	COAXIAL CABLE	1	FUJIKURA	ACA00074-N/1	1.5D-HQEW (BLACK) 순수 CABLE 길이 (1558mm)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE 2016. 07. 22.			RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
CUSTOMER CODE		APPROVED BY I.C.KIM			
CABLE LENGTH TOLERANCE		CHECKED BY			
0 ~ 1000mm : +5, -0		DRAWN BY H.J.LEE	TITLE CABLE ASS'Y (RF용)		
1000 ~ 2000mm : +10, -0		CHECKED BY	A4 DWG NO. CF01097-7/1		
2000 ~ 3000mm : +15, -0		SCALE 1/1	DETAIL NO.		
3000 ~ 4000mm : +20, -0		UNIT mm	REVISION		
4000 ~ 5000mm : +25, -0			R SHEET 1 of 1		
5000 ~ : +10%					