


REVISION					
No.	DESCRIPTION	REV	DRAWN	APPR	DATE
1	Initial Registration	IR	C.K.KIM	I.C.KIM	2016. 10. 12.

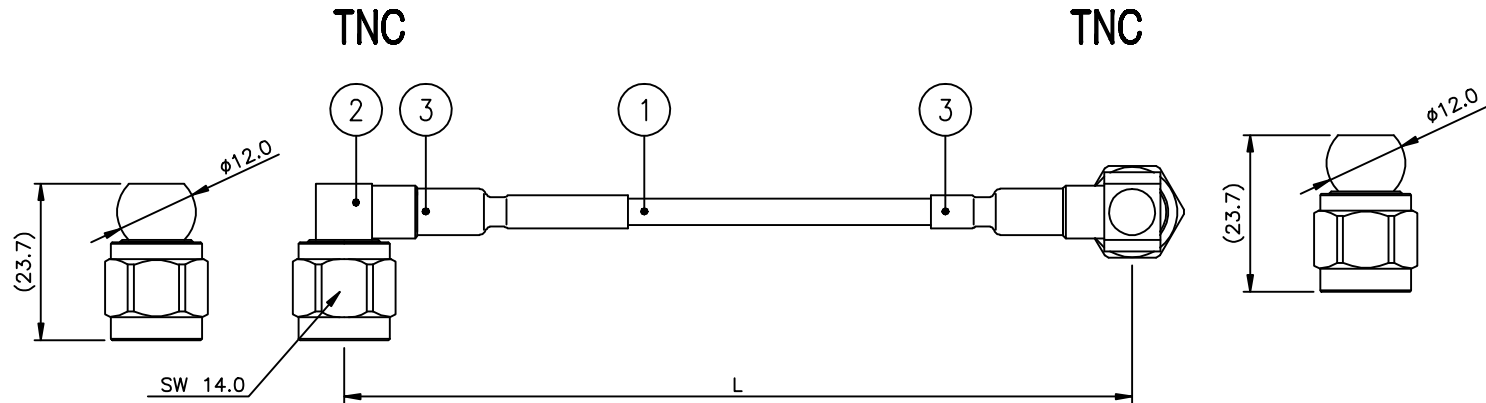


Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES

2-1. TNC PL → BODY : SUCO 3micron Plating
 CONTACT : Silver 5micron Plating
 CAP : Nickel Plating
 COVER : SUCO Plating

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2
4. INSERTION LOSS (Min) : -0.5dB
5. PIMD range : 145dBc 이상 (20W+2Tone)
 [CDMA 장비 3차 기준]

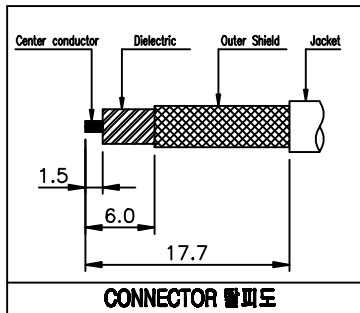

CONNECTOR 단면도

	3	MARKING TUBE	2	LS TUBE	ATU00216-N/1	ø8-32mm (White)
	2	CONNECTOR	2	KJ COMTECH	CN03042-7/2	TNC50 PL
	1	COAXIAL CABLE		EXPANTEL	ACA00044-N/1	141MF(50Q) BLUE (선+ 케이블 길이 121mm)
CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS
	DATE	2016. 10. 12.				RF & MICROWAVE TECHNOLOGY Tel : 02-02-047-0015 Fax : 02-02-047-0017
CUSTOMER CODE	APPROVED BY	I.C.KIM		KJ COMTECH CO.,LTD.		
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			TITLE		
	DRAWN BY	C.K.KIM				
	CHECKED BY					
	SCALE	UNIT		A4		
N/S	mm					
				DWG NO.	CF01104-7/1	
				DETAIL NO.		
				REVISION	I R	SHEET 1 of 1