


* TNC 커넥터 PIPE HEX 7.2로 압착

REVISION					
No.	DESCRIPTION	REV	DRAWN	APPR	DATE
1R	Initial Registration	1R	C.K.KIM	L.C.KIM	2016. 10. 25.

4.3/10DIN

TNC

* 4.3-10 커넥터 PIPE 압착 하지
않고 BONDING TUBE 작업 할 것

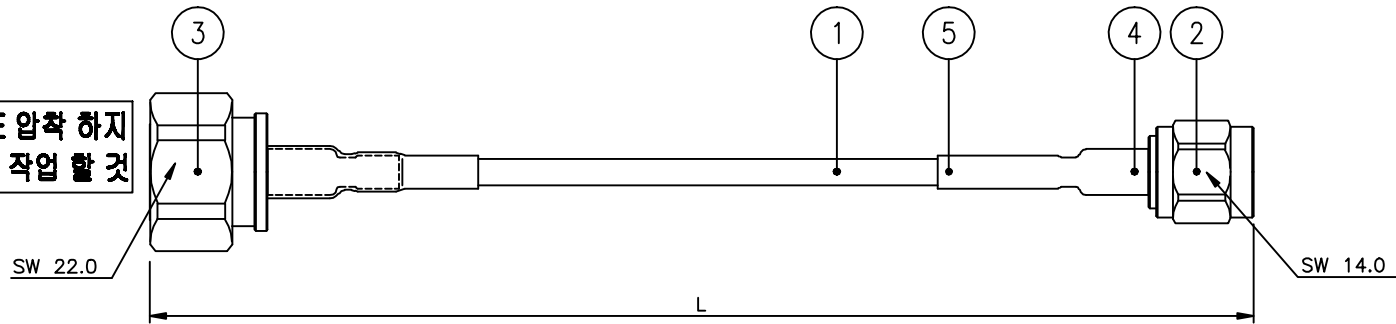

Notes

1. RoHS & Pb-FREE



2. CONNECTOR FINISHES

- 2-1. TNC PS → BODY : SUCO 3micron Plating
CONTACT : Silver 5micron Plating
CAP : Nickel Plating
- 2-2. 4.3/10 PS → BODY : SUCO 3micron Plating
CONTACT : Silver 5micron Plating
CAP : Nickel Plating

*4.3-10 PIN높이 0.6~0.8mm 맞출 것.

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2
4. INSERTION LOSS (Min) : -0.45dB
5. PIMD SPEC : 145dBc 이상 (20W+2Tone)
[CDMA 장비 3차 기준]

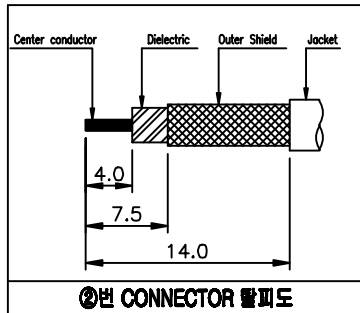

5	MARKING TUBE	2	LS TUBE	ATU00210-N/1	ø6-45mm (White)
4	BONDING TUBE	1	LS TUBE	ATU00000-N/1	ø6-35mm (Black)
3	CONNECTOR	1	KJ COMTECH	CN08608-7/6	4.3-10 DIN50 PS (SCREW)
2	CONNECTOR	1	KJ COMTECH	CN08649-7/1	TNC50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00449-N/1	LH21r (BLUE) (색상 일치 61mm)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE			2016. 10. 25.		
APPROVED BY					RF & MICROWAVE TECHNOLOGY
I.C.KIM			KJ COMTECH CO.,LTD.		Tel : 82-22-947-4015 Fax : 82-22-947-3077
CHECKED BY			TITLE		
			RF CABLE		
DRAWN BY			DWG NO.		
C.K.KIM			CF01107-7/1		
CHECKED BY			DETAIL NO.		
SCALE		UNIT	A4		
N/S	mm				
			REVISION		SHEET
			1 R		1 of 1

CUSTOMER

CUSTOMER CODE

CABLE LENGTH TOLERANCE
0 ~ 1000mm : +5, -0
1000 ~ 2000mm : +10, -0
2000 ~ 3000mm : +15, -0
3000 ~ 4000mm : +20, -0
4000 ~ 5000mm : +25, -0
5000 ~ : +10%



RF & MICROWAVE
TECHNOLOGY
Tel : 02-02-047-0016
Fax : 02-02-047-0017