
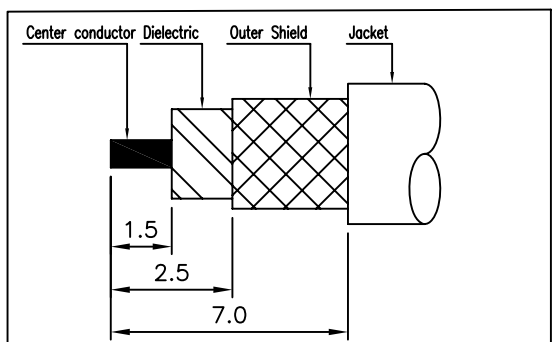



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2017.04.17.

MCX

SMBL

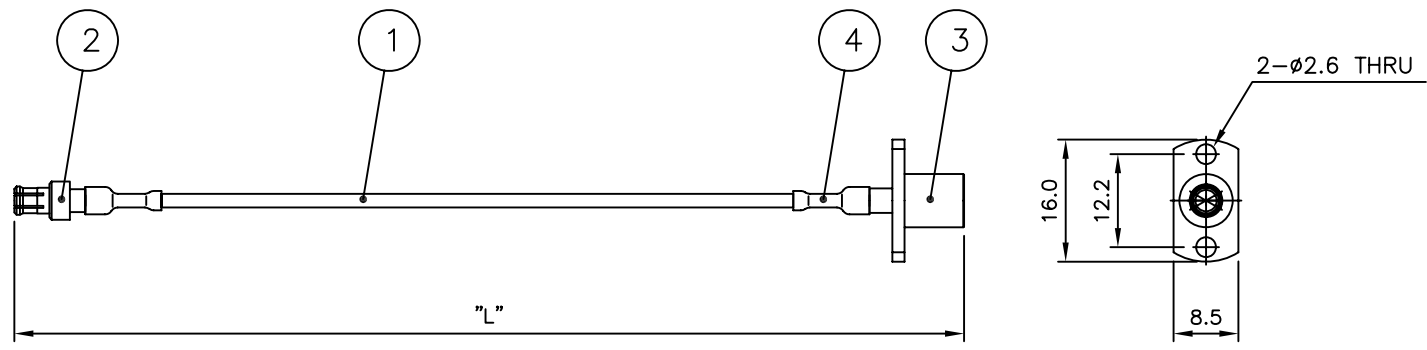

② CONNECTOR 탈피도

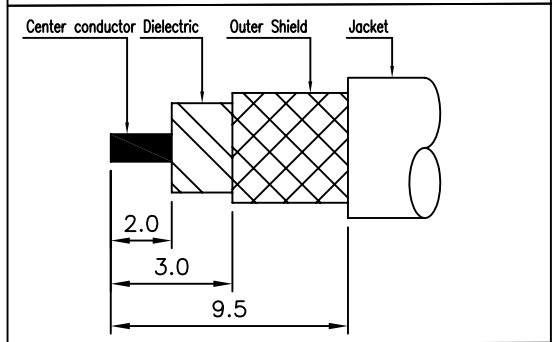


③ CONNECTOR 탈피도

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. MCX50 PS-----▶▶ BODY : Gold Plating
CONTACT : Gold Plating
 - 2-2. SMBL50 JS-2H -----▶▶ BODY : Nickel Plating
CONTACT : Gold Plating

4	SHRINK TUBE	2	LS TUBE	ATU00211-N/1	ø3.5-WHITE
3	CONNECTOR	1	KJ COMTECH	CN03433-7/3	SMBL50 JS-2H
2	CONNECTOR	1	KJ COMTECH	CN03308-7/1	MCX50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00114-N/1	47FJ(50Ω) (CLEAR)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
	DATE 2017. 04. 17.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
CUSTOMER CODE	APPROVED BY	I.C.KIM					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			TITLE CABLE ASS'Y			
	DRAWN BY	S.Y.EUN					
	CHECKED BY			A4	DWG NO.	CF01137-7/1	
	SCALE N/S	UNIT mm			DETAIL NO.		
					REVISION	I R	SHEET

CABLE LENGTH TOLERANCE
0 ~ 1000mm : +5, -0
1000 ~ 2000mm : +10, -0
2000 ~ 3000mm : +15, -0
3000 ~ 4000mm : +20, -0
4000 ~ 5000mm : +25, -0
5000 ~ : +10%