


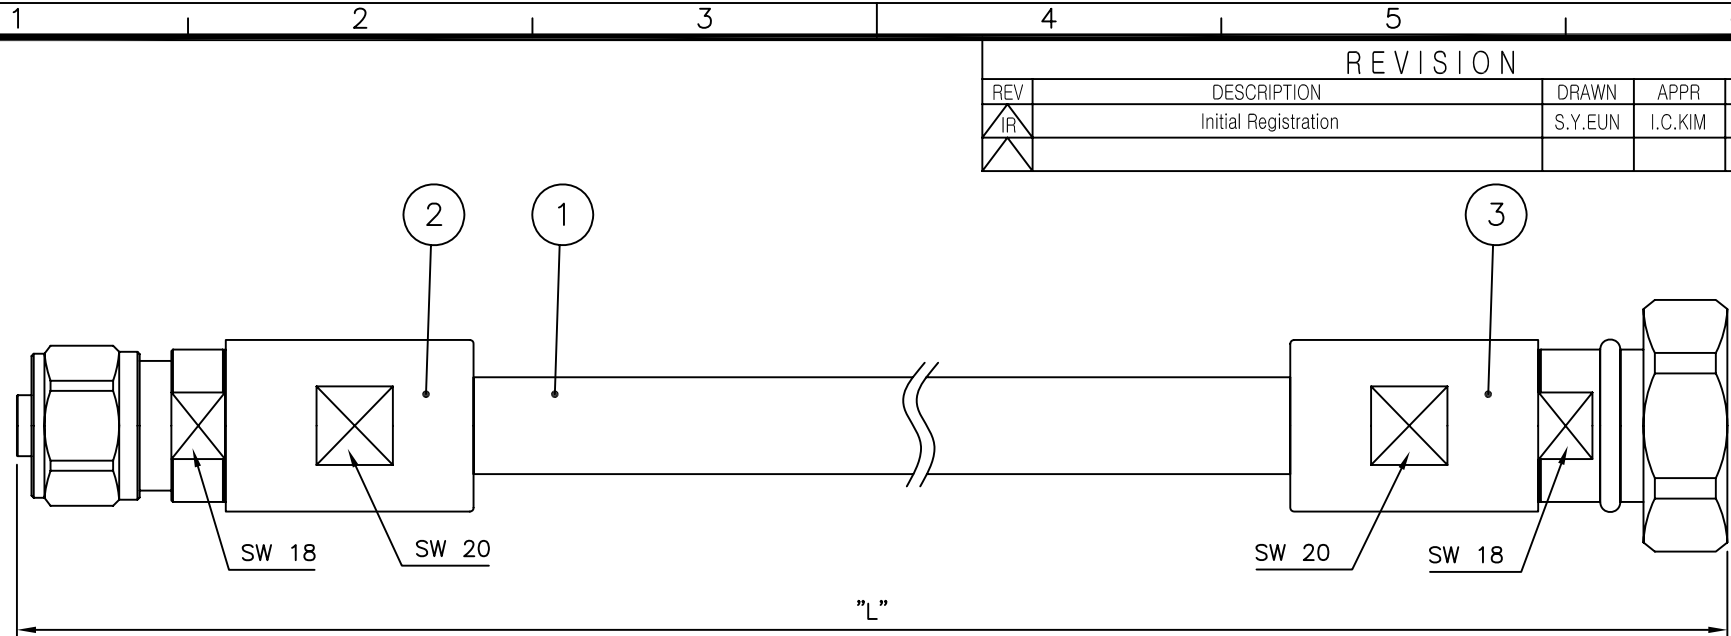


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021. 05. 10.

Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - 2-1. N50 PS -----▶▶ BODY : SUCO (5μm) Plating
CONTACT : Silver (5μm) Plating
CAP : Nickel Plating
 - 2-1. 7/16 DIN50 PS --▶▶ BODY : SUCO (5μm) Plating
CONTACT : Silver (5μm) Plating
CAP : SUCO Plating

ELECTRICAL DATA :

- IMPEDANCE : 50ohm
- FREQUENCY RANGE : DC~3GHz
- VSWR (Max) : 1.2
- PIMD SPEC : 155dBc (Min) (20W*2Tone)

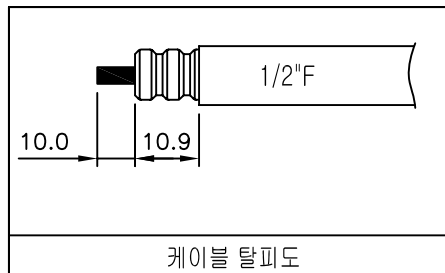

■ 케이블 작업순서

- 케이블 절단은 운반이 용이한 원형톱기계로 절단
- 케이블 탈피기 전용 장비를 사용하여 심선 탈피
- 케이블 심선 비닐 벗기고 끝단 리머후 사포
- 케이블 자켓 탈피 길이에 맞게 칼로 벗겨냄
- 케이블 심선 + 핀 납땜 작업 (케이블 내부 FORM 녹지 않게 주의)
- 케이블 자켓 위로 BACK NUT를 끼워넣고 인서트를 끼운다.
- 케이블 OUTER CONDUCTOR 에 인서트2EA를 끼워넣고 O-RING 고정
- BODY + BACK NUT 를 조립한다.

3	CONNECTOR	1	KJ COMTECH	CN03406-7/2	7/16 DIN50 PS	
2	CONNECTOR	1	KJ COMTECH	CN03708-7/1	N50 PS	
1	COAXIAL CABLE		LS 전선	ACA00005-N/1	1/2"F(50Ω)	
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
APPROVED BY		I.C.KIM				
CHECKED BY						
DRAWN BY		S.Y.EUN				
CHECKED BY				TITLE CABLE ASS'Y		
SCALE		UNIT				
N/S		mm				
						
			A4			
			DWG NO.		CF01150-7/6	
			DETAIL NO.			
			REVISION		I R	
			SHEET		1 of 1	

