


REVISION				
No.	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2017. 06. 01.

* 4.3-10 커넥터 PIPE 압착 하지
않고 BONDING TUBE 작업 할 것

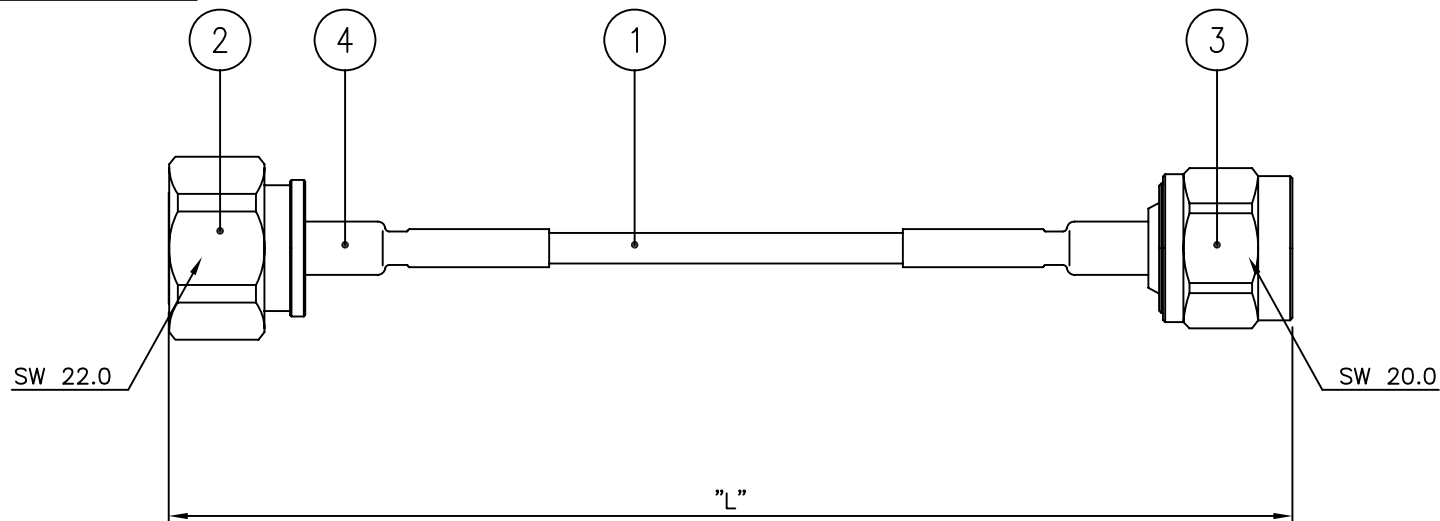

Notes

1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

2-1. N PS----▶▶BODY : SUCO Plating

CONTACT : Silver 3micron Plating

CAP : Nickel Plating

2-2. 4.3/10 PS--▶▶BODY : SUCO 3micron Plating

CONTACT : Silver 5micron Plating

CAP : Nickel Plating

*4.3-10 PIN높이 0.6~0.8mm 맞출 것.



ELECTRICAL DATA :

1. IMPEDANCE : 50ohm

2. FREQUENCY RANGE : DC~3GHz

3. VSWR (Max) : 1.2

4. PIMD SPEC : 155dBc 이상 (20W*2Tone)
[CDMA / WCDMA 장비 3차 기준]

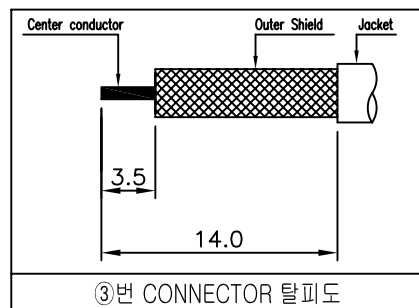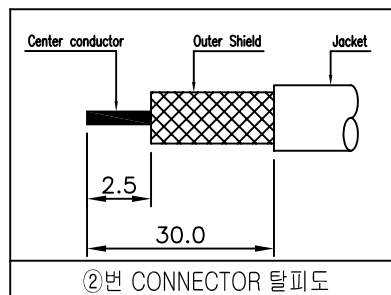

CUSTOMER	
CUSTOMER CODE	
CABLE LENGTH TOLERANCE	0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%

4	BONDING TUBE	2	LS TUBE	ATU00006-N/1	ø6~35mm (Black)
3	CONNECTOR	1	KJ COMTECH	CN02761-7/4	N50 PS
2	CONNECTOR	1	KJ COMTECH	CN03608-7/B	4.3/10 DIN50 PS (SCREW)
1	COAXIAL CABLE		EXPANTEL	ACA00044-N/1	141MF(50Ω) BLUE

NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE 2017. 06. 01.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
APPROVED BY					
CHECKED BY			TITLE RF CABLE		
DRAWN BY	I.C.KIM				
CHECKED BY			A4 DWG NO. CF01155-7/1 DETAIL NO. REVISION I R SHEET 1 of 1		
SCALE	UNIT				
N/S	mm				