

ELECTRICAL DATA :

1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.3


MECHANICAL DATA :

1. TEMPERATURE RANGE : -65° C ~ 165°C

- ▶ 상대물 체결 검사 필히 할 것
 -> 상대물 CN03692-7/1 (AMBL50 PCB JB-4R)
 -> 체결 후 cap의 이동이 없을 것

REVISION


REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2017. 08. 18.

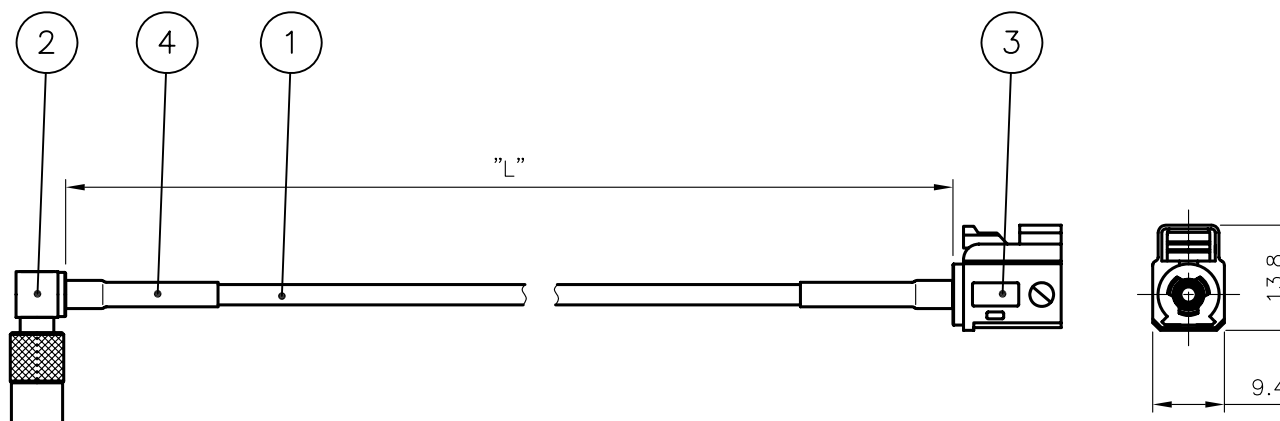

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. FAKRA Female---▶ BODY : Nickel Plating
CONTACT : Gold Plating
 - 2-2. AMBL Male---▶ BODY : Nickel Plating
CONTACT : Gold Plating

L		FAKRA FEMALE SMB 50Ω	3601NTG14L6
---	--	-------------------------	-------------

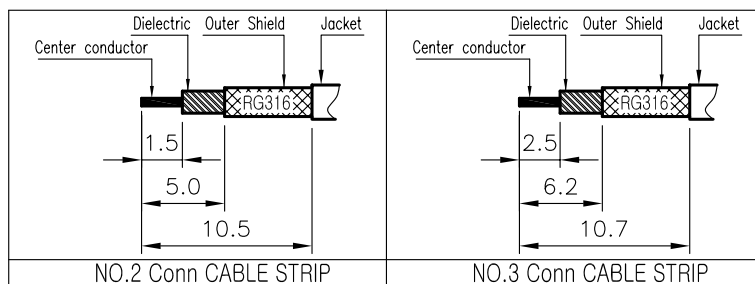

4	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	ø4-20 (Black)
3	CONNECTOR	1	KJ COMTECH	CN03693-N/3	FAKRA JS
2	CONNECTOR	1	KJ COMTECH	CN03702-7/2	AMBL PL
1	COAXIAL CABLE		EXPANTEL	ACA00048-N/1	RG316(50Ω) (BROWN)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE	2017. 08. 18.				
CUSTOMER CODE	APPROVED BY	I.C.KIM				
	CHECKED BY					
CABLE LENGTH TOLERANCE	DRAWN BY	S.Y.EUN				
	CHECKED BY					
SCALE		UNIT				
N/S		mm				
		A4				
		DWG NO.	CF01172-7/1			
		DETAIL NO.				
		REVISION	I R	SHEET 1 of 1		

CABLE LENGTH TOLERANCE
 0 ~ 1000mm : +5, -0
 1000 ~ 2000mm : +10, -0
 2000 ~ 3000mm : +15, -0
 3000 ~ 4000mm : +20, -0
 4000 ~ 5000mm : +25, -0
 5000 ~ : +10%