



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2018.03.12.

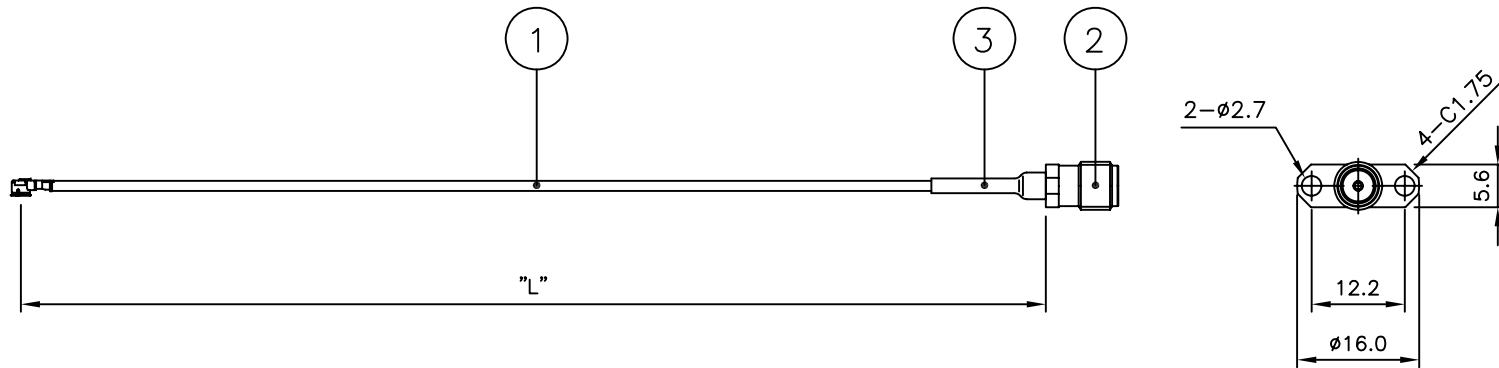

Notes


- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - 2-1. SMA JS-2H---▶▶ BODY : Gold Plating
CONTACT : Gold Plating

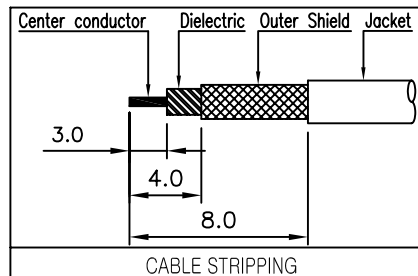

※ 주의사항

- SMA 커넥터 절연체 내경 $\phi 1.35$ 핀게이지로 넓혀서 사용할 것.
- ASS'Y 작업 시 커넥터 방향 주의.

3	BONDING TUBE	1	LS TUBE	ATU00004-N/1	$\phi 4-15$ mm (Black)
2	CONNECTOR	1	KJ COMTECH	CN03442-7/1	SMA50 JS-2H
1	COAXIAL CABLE		SUNRIDGE	ACA00357-N/1	MCB/#54-1.33 ϕ (Black)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
	DATE 2018. 03. 12.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
CUSTOMER CODE	APPROVED BY	I.C.KIM					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			TITLE CABLE ASS'Y			
	DRAWN BY	S.Y.EUN					
	CHECKED BY			A4	DWG NO.	CF01211-7/1	
	SCALE	UNIT			DETAIL NO.		
	N/S	mm			REVISION	I R	SHEET

CABLE LENGTH TOLERANCE
 0 ~ 1000mm : +5, -0
 1000 ~ 2000mm : +10, -0
 2000 ~ 3000mm : +15, -0
 3000 ~ 4000mm : +20, -0
 4000 ~ 5000mm : +25, -0
 5000 ~ : +10%