


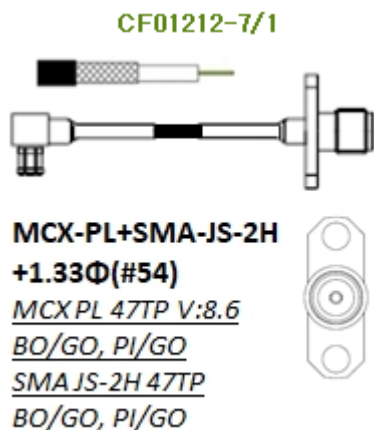

CF01212-7/1 135mm

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

135mm - S11/S22/S21 (SWR, SWR, dB)

■ _0.5GHz	- 1.07, 1.06, 0.18
■ _1.0GHz	- 1.06, 1.06, 0.26
■ _1.5GHz	- 1.20, 1.20, 0.38
■ _2.0GHz	- 1.13, 1.12, 0.42
■ _3.0GHz	- 1.28, 1.27, 0.58
■ _4.0GHz	- 1.30, 1.28, 0.69
■ _5.0GHz	- 1.33, 1.27, 0.78
■ _6.0GHz	- 1.16, 1.10, 0.78

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)


■ N Male to SMA Male

■ MCX (J) SMA (J) 2H

□ ZVA50 (~50GHz)

10GHz Cable (CF00540-7/1)

AD00156-7/3

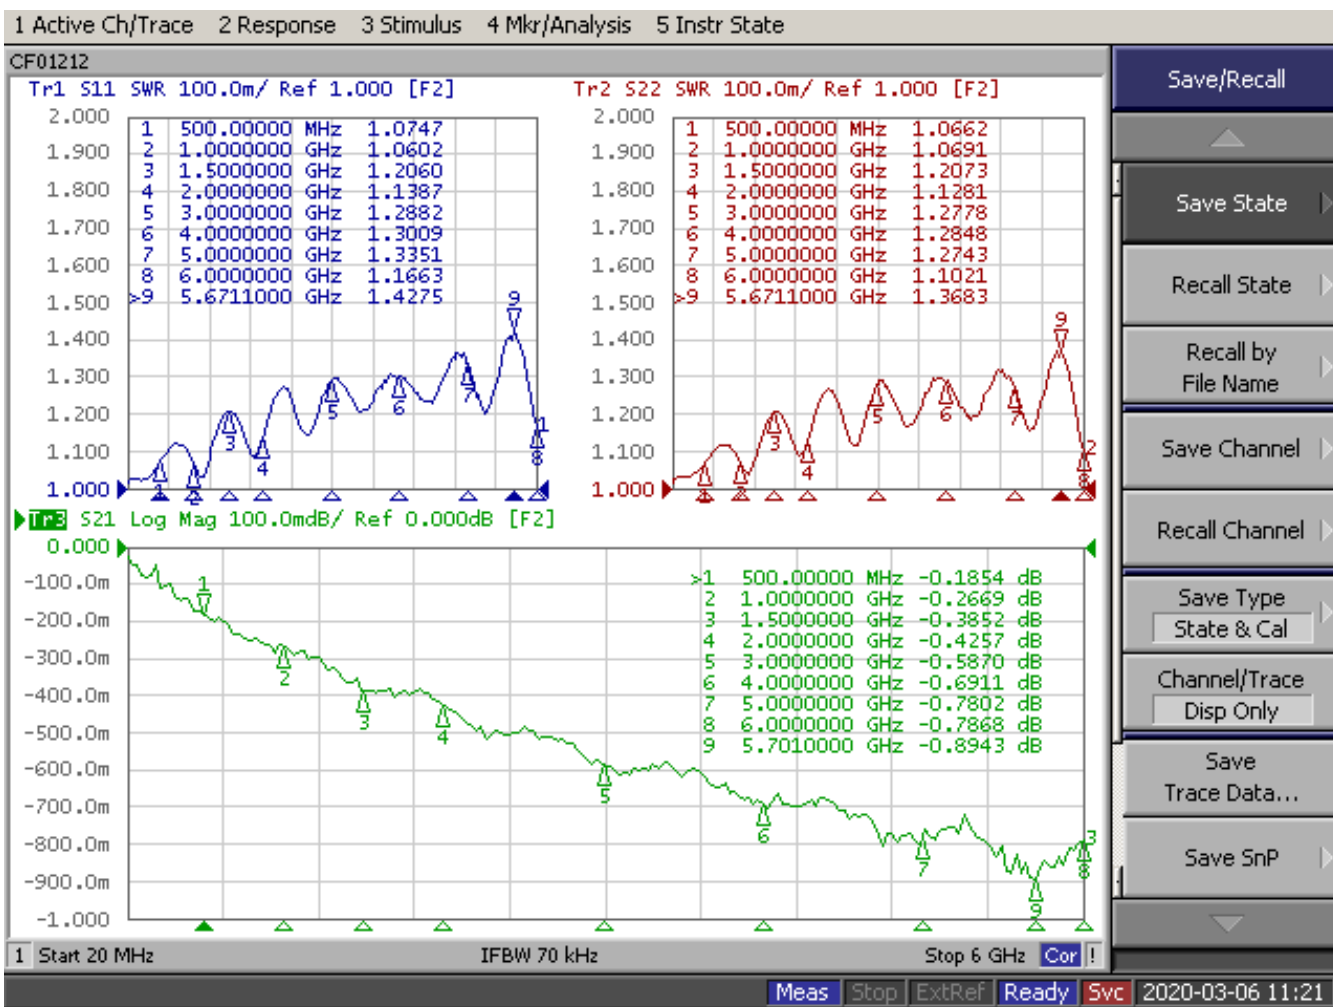

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)