



Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	

Un mate

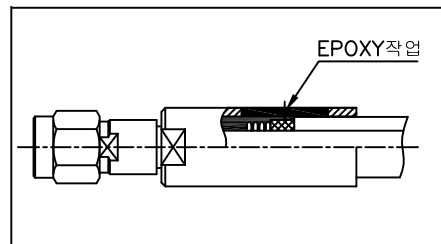

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019.06.19.

※ 케이블 특성 불량 감안하여 길이 +로 여유있게 작업 요망※
 ※ 제품별 1:1 측정한 DATA 출력하여 제출할 것 ※
 - 측정 DATA 저장 시 시리얼No.포함 할 것

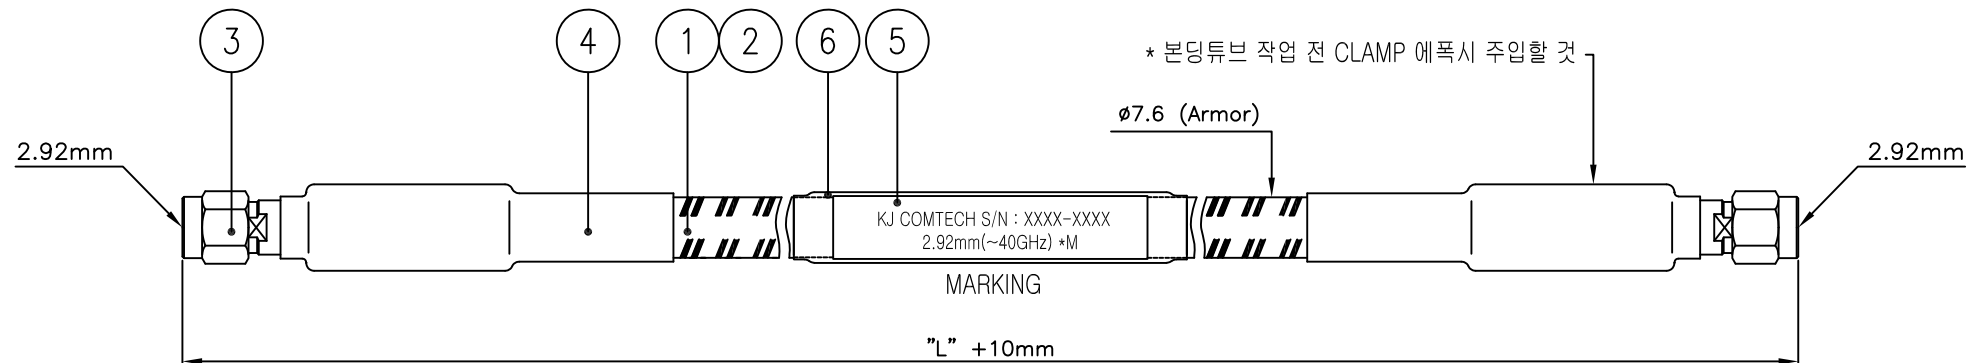

* ASS'Y 주의사항 작업지도서 참고할 것*
 포장사양 도면등록 첨부파일 참조

순수 케이블 절단 길이 : L-15mm
 Armor 절단 길이 : L-55mm


해당년도 4자리수 | 수주등록 시리얼번호
 KJ COMTECH S/N : XXXX-XXXX
 2.92mm(~40GHz) *M
 MARKING

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~40GHz
3. VSWR (Max) : 1.2

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. 2.92mm PS----▶ BODY : SUS / Passivated
 CONTACT : BRASS / Gold Plating
 COUPLING CAP : SUS / Passivated

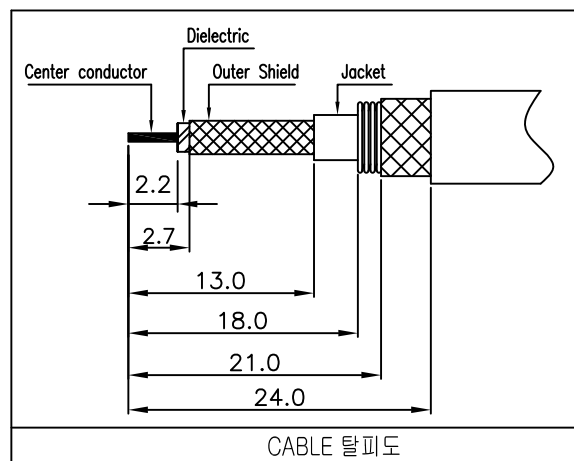

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
	DATE 2019. 06. 19.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
CUSTOMER CODE	APPROVED BY	I.C.KIM					TITLE CABLE ASS'Y
	CHECKED BY						
CABLE LENGTH TOLERANCE 0 ~ 50mm : +0.5 ~ -0.5 50 ~ 200mm : +1.0 ~ -1.0 100 ~ 500mm : +2.0 ~ -2.0 200 ~ 500mm : +3.0 ~ -3.0 Bending Angles : -1.0° ~ -3.0°	DRAWN BY	S.Y.EUN		A4			
	CHECKED BY						
	SCALE	N/S	UNIT		DWG NO. CF01224-7/5		
				REVISION		I R	SHEET 1 of 1