


Notes




1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

2-1. F50 PS---▶▶ BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

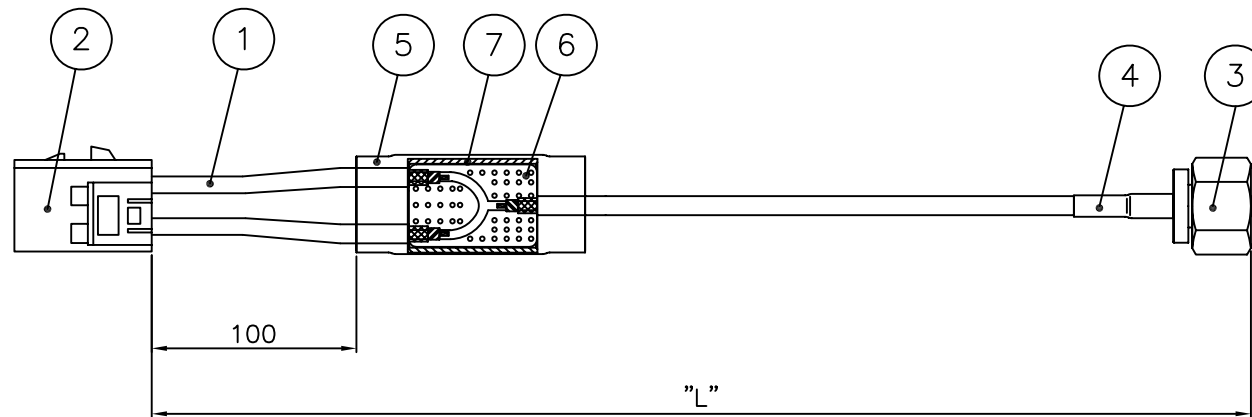

* PCB에 케이블 납땜 → PIPE에 PCB 조립 → 본딩튜브 작업할 것

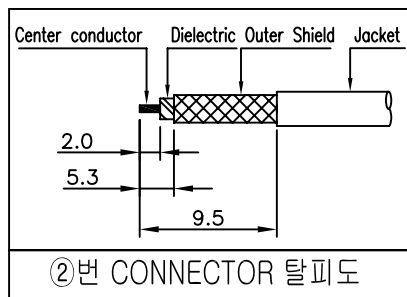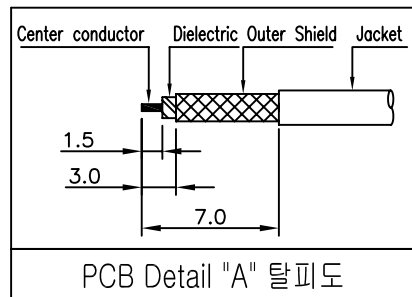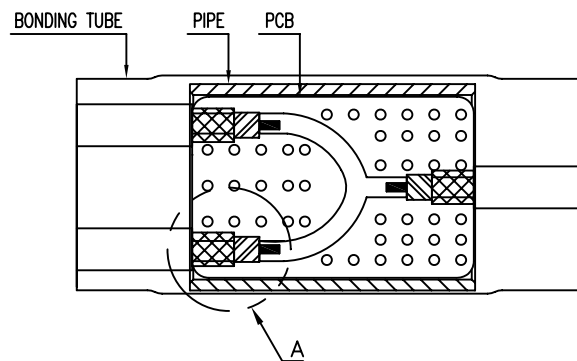

CUSTOMER

CUSTOMER CODE

CABLE LENGTH TOLERANCE
0 ~ 1000mm : +5, -0
1000 ~ 2000mm : +10, -0
2000 ~ 3000mm : +15, -0
3000 ~ 4000mm : +20, -0
4000 ~ 5000mm : +25, -0
5000 ~ : +10%

* HIROSE GT13 Connector + RG316(BLUE) ASSY 사급품

7	FERRULE	1	KJ COMTECH	DFE00070-5/1	
6	PCB	1	KJ COMTECH	DPC01068-9/1	
5	BONDING TUBE	1	LS TUBE	ATU00013-N/1	ø13-30 (BLACK)
4	SHRINK TUBE	1	LS TUBE	ATU00095-N/1	ø4-20 (BLUE)
3	CONNECTOR	1	KJ COMTECH	CN02312-7/5	F50 PS
2	CONNECTOR	1	HIROSE	---	GT13 Dual (사급품)
1	COAXIAL CABLE		---	---	RG316 (50Ω) BLUE (사급품)

NO.		DESCRIPTION		Q'TY	VENDER	PART NO.	RAMARKS		
DATE 2018. 11. 29.					 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.				
APPROVED BY		I.C.KIM							
CHECKED BY					TITLE CABLE ASS'Y				
DRAWN BY		S.Y.EUN							
CHECKED BY					A4 DWG NO. CF01246-7/5 DETAIL NO. REVISION I R SHEET 1 of 1				
SCALE		UNIT							
N/S		mm							

