


Notes

1. RoHS & Pb-FREE

2. CONNECTOR FINISHES





2-1. SMA50 PS---▶▶ BODY : Gold Plating
CONTACT : Gold Plating
CAP : Gold Plating

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019. 06. 14.

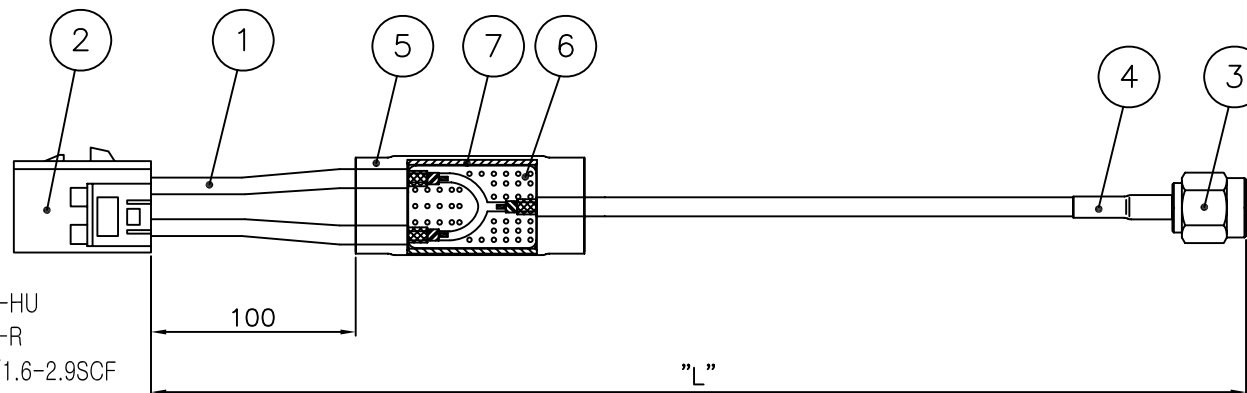

* Housing : GT13SC-2S-HU
* Retainer : GT13SC-2S-R
* Terminal : GT13-2428/1.6-2.9SCF

* PCB에 케이블 납땜 → PIPE에 PCB 조립 → 본딩튜브 작업할 것

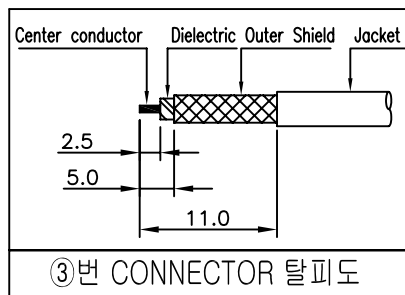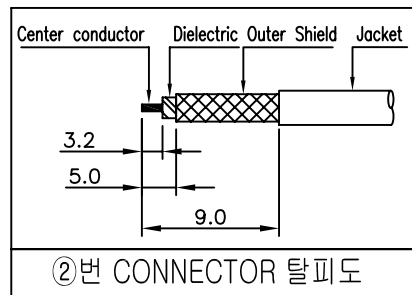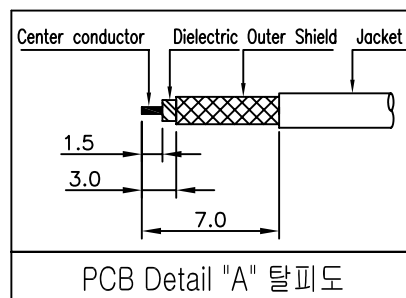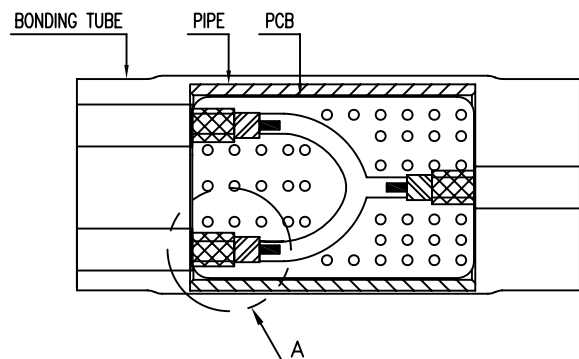

CUSTOMER	
CUSTOMER CODE	
CABLE LENGTH TOLERANCE	
0 ~ 1000mm : +5, -0	
1000 ~ 2000mm : +10, -0	
2000 ~ 3000mm : +15, -0	
3000 ~ 4000mm : +20, -0	
4000 ~ 5000mm : +25, -0	
5000 ~ : +10%	

7	FERRULE	1	KJ COMTECH	DFE00070-5/1	
6	PCB	1	KJ COMTECH	DPC01068-9/1	
5	BONDING TUBE	1	LS TUBE	ATU00013-N/1	ø13-30 (BLACK)
4	SHRINK TUBE	1	LS TUBE	ATU00212-N/1	ø4-20 (WHITE)
3	CONNECTOR	1	KJ COMTECH	CN00962-7/4	SMA50 PS
2	CONNECTOR	1	HIROSE	DCN00327-N/1	GT13
1	COAXIAL CABLE		EXPANTEL	ACA00048-N/1	RG316 (50Ω) (BROWN)

NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE 2019. 06. 14.					
APPROVED BY I.C.KIM					
CHECKED BY					
DRAWN BY S.Y.EUN					
CHECKED BY					
SCALE N/S		UNIT mm		TITLE	
				CABLE ASS'Y	
				DWG NO. CF01246-7/6	
				DETAIL NO.	
				REVISION I R	
				SHEET 1 of 1	