
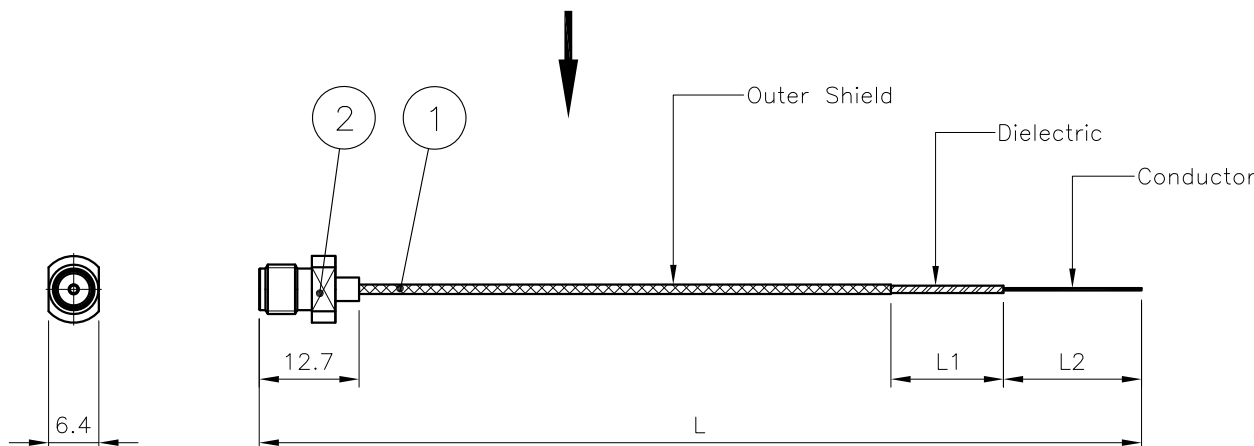


절단 및 탈피 길이(mm)			디핑 여부 V체크
Cable	L		—
Dielectric	L1		—
Conductor	L2		—

■탈피기 : M-005-011 로 작업 요망

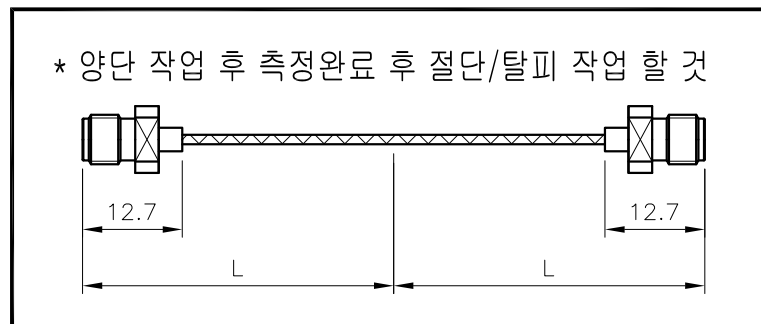

ELECTRICAL DATA :

1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.25
4. DIELECTRIC WITHSTANDING VOLTAGE : 750 V RMS Max.
5. INSULATION RESISTANCE : ≥5000MΩ

MECHANICAL DATA :

1. DURABILITY : 500 CYCLES MIN.
2. TEMPERATURE RANGE : -40° C ~ 125°C

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA JS---▶BODY : Gold Plating
CONTACT : Gold Plating

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2023. 07. 05.

	2	CONNECTOR	1	KJ COMTECH	CN03344-7/1	SMA50 JS	
	1	COAXIAL CABLE		EXPANTEL	ACA00025-N/1	47F (50Ω)	
CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
	DATE2023. 07. 05.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8011			
CUSTOMER CODE	APPROVED BY			TITLECABLE ASS'Y			
	CHECKED BY						
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.H.KIM		A4 DWG NO. CF01257-7/1 DETAIL NO. REVISION I R SHEET1 of 1			
	CHECKED BY						
	SCALE	UNIT					
	N/S	mm					