

ELECTRICAL DATA :


1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : 5.8GHz~5.9GHz
3. VSWR (Max) : 1.3

MECHANICAL DATA :

1. TEMPERATURE RANGE : $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$



REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019. 01. 02.

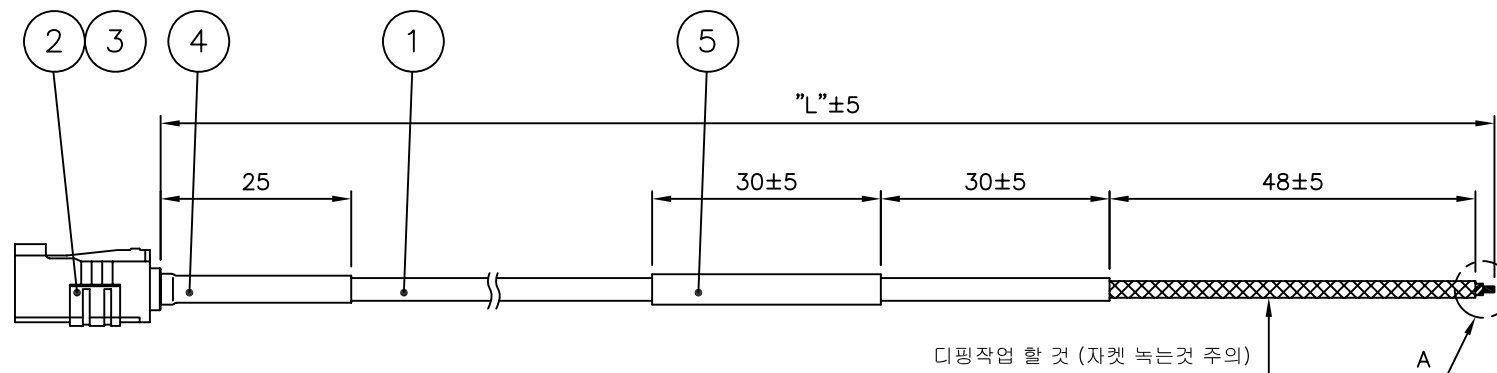

Notes


1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. FAKRA JS -----▷ BODY : Nickel Plating
CONTACT : Gold Plating

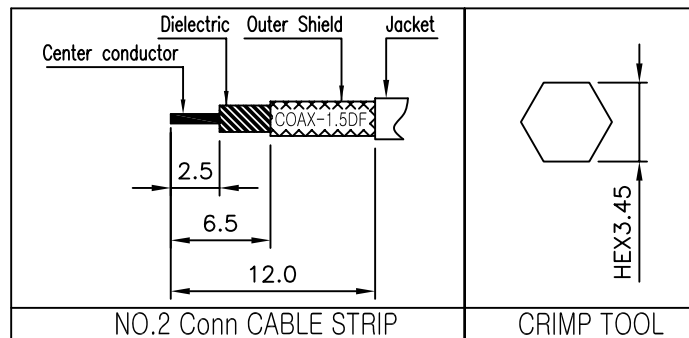

"A" Detail

- * 케이블 은박지 쉴드 안쪽 부분까지 올려서 작업 할 것
- * 케이블 양단 작업 후 특성 확인 → 절단하여 디핑 후 탈피 작업

5	SHRINK TUBE	1	LS TUBE	ATU00212-N/1	ø4-30mm (White)
4	SHRINK TUBE	1	LS TUBE	ATU00212-N/1	ø4-25mm (White)
3	TERMINAL PIN	1	KET	KR20301-20	(사급품)
2	CONNECTOR	1	KET	KR21101-0K	FAKRA JS (K Type) (사급품)
1	COAXIAL CABLE		COAX-PARK	ACA00503-N/1	COAX-1.5DF (Black)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2019. 01 02.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
CUSTOMER CODE	APPROVED BY	I.C.KIM				
	CHECKED BY					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.Y.EUN		TITLE CABLE ASS'Y		
	CHECKED BY					
	SCALE	UNIT		A4		
	N/S	mm				