

ELECTRICAL DATA :


1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : 5.8GHz~5.9GHz
3. VSWR (Max) : 1.3

MECHANICAL DATA :

1. TEMPERATURE RANGE : $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$



REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019. 01. 02.

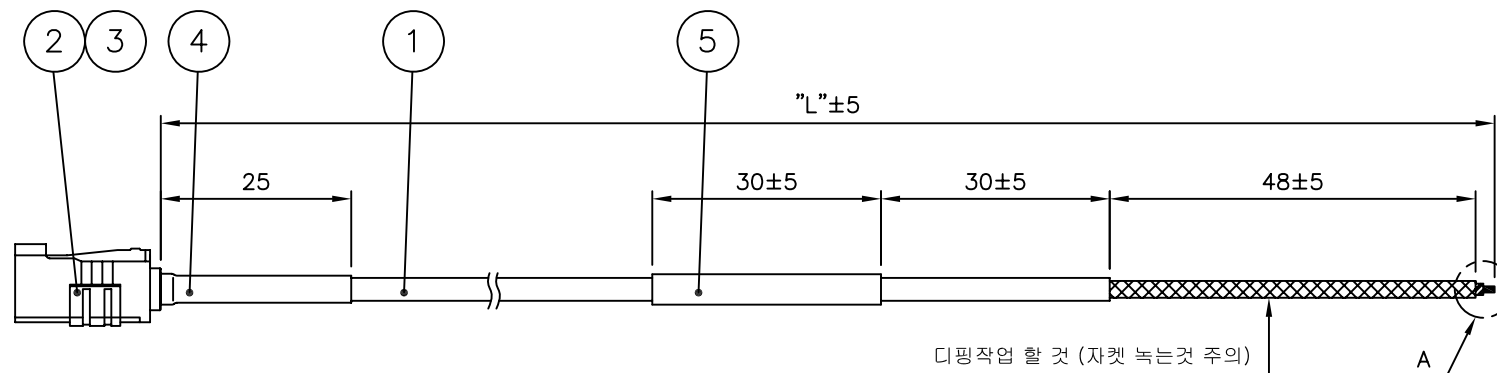

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. FAKRA JS -----▷ BODY : Nickel Plating
CONTACT : Gold Plating

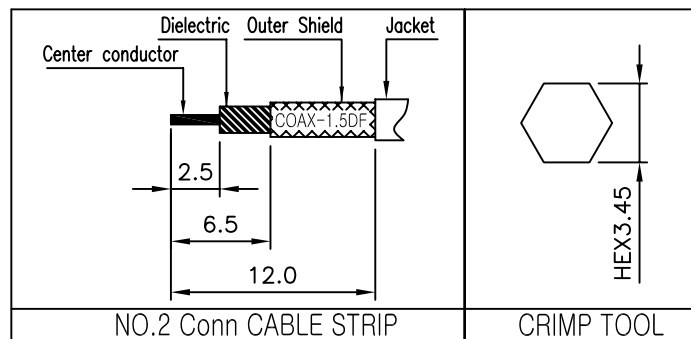

"A" Detail

- * 케이블 은박지 쉴드 안쪽 부분까지 올려서 작업 할 것
- * 케이블 양단 작업 후 특성 확인 → 절단하여 디핑 후 탈피 작업

5	SHRINK TUBE	1	LS TUBE	ATU00173-N/1	ø4-30mm (Red)
4	SHRINK TUBE	1	LS TUBE	ATU00173-N/1	ø4-25mm (Red)
3	TERMINAL PIN	1	KET	KR20301-20	(사급품)
2	CONNECTOR	1	KET	KR21101-0K	FAKRA JS (K Type) (사급품)
1	COAXIAL CABLE		COAX-PARK	ACA00503-N/1	COAX-1.5DF (Black)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS

DATE 2019. 01 02.

CUSTOMER

CUSTOMER CODE

CABLE LENGTH TOLERANCE

0 ~ 1000mm : +5, -0
 1000 ~ 2000mm : +10, -0
 2000 ~ 3000mm : +15, -0
 3000 ~ 4000mm : +20, -0
 4000 ~ 5000mm : +25, -0
 5000 ~ : +10%

APPROVED BY

I.C.KIM

CHECKED BY


DRAWN BY

S.Y.EUN

CHECKED BY

SCALE

UNIT



N/S

mm



RF & MICROWAVE
 TECHNOLOGY
 Tel : 82-32-347-8015
 Fax : 82-32-347-8017

TITLE

CABLE ASS'Y

DWG NO.

CF01260-7/1

DETAIL NO.

REVISION

I R

SHEET

1 of 1