


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.Y.EUN	I.C.KIM	2019. 01. 15.

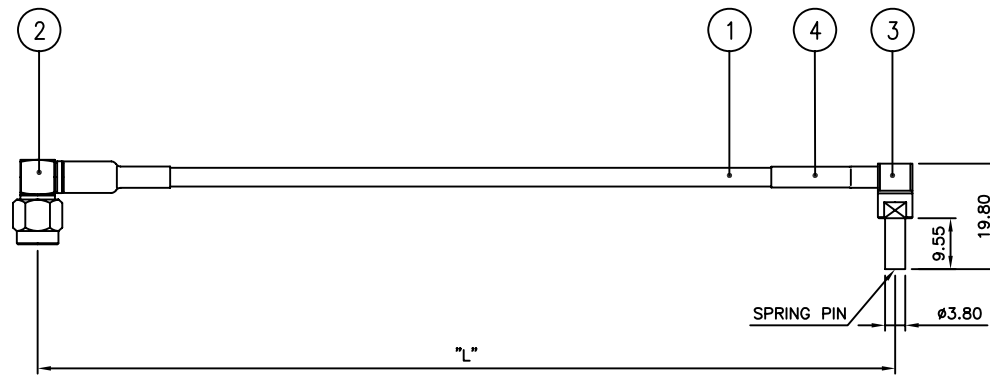


► ELECTRICAL SPECIFICATIONS

Impedance - 50Ω
 Frequency Range - DC~2.7GHz
 Insertion Loss - Marker 1 : 0.8GHz - 0.49dB ±0.15
 Marker 2 : 0.9GHz - 0.52dB ±0.15
 Marker 3 : 1.8GHz - 0.79dB ±0.15

Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - 2-1. KMS-156 PL---►►BODY : Nickel Plating
CONTACT : Gold Plating
COVER : Nickel Plating
CAP : Nickel Plating
 - 2-2. SMA PL---►►BODY : Gold Plating
CONTACT : Gold Plating
CAP : Gold Plating

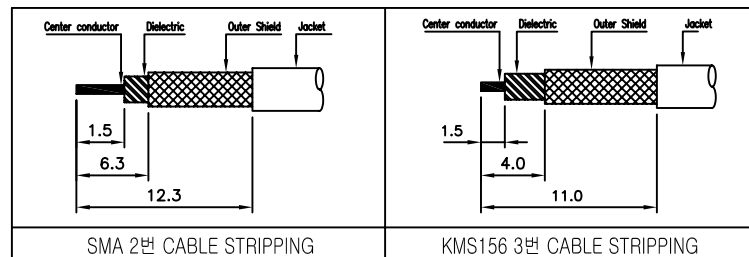

4	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	Ø4x20mm - Black
3	CONNECTOR	1	KJ COMTECH	CN03061-7/3	KMS-156 PL
2	CONNECTOR	1	KJ COMTECH	CN01092-7/3	SMA50 PL
1	COAXIAL CABLE	1	FUJIKURA	ACA00210-N/1	EM-1.5D-HQEW (BLACK)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
	DATE	2019. 01. 15.		RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
CUSTOMER CODE	APPROVED BY	I.C.KIM		KJ COMTECH CO.,LTD.			
	CHECKED BY			TITLE			
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.Y.EUN		CABLE ASS'Y			
	CHECKED BY						
	SCALE	UNIT		A4	DWG NO.	CF01281-7/1	
	1/1	mm			DETAIL NO.		
					REVISION	I R	SHEET 1 of 1

CABLE LENGTH TOLERANCE
 0 ~ 1000mm : +5, -0
 1000 ~ 2000mm : +10, -0
 2000 ~ 3000mm : +15, -0
 3000 ~ 4000mm : +20, -0
 4000 ~ 5000mm : +25, -0
 5000 ~ : +10%

KJ COMTECH
 RF & MICROWAVE TECHNOLOGY
 Tel : 82-32-347-8015
 Fax : 82-32-347-8017